

FLANGE ADAPTOR FOR PE/PVC PIPES series AQZ



APPLICATION

Flange adaptors dedicated for PE and PVC pipes

DESIGN FEATURES

Quick restrained connection with brass ring prevents axial movement of the pipe

TECHNICAL CHARACTERISTICS

Flange end connections according to EN1092-2: PN10&PN16

Maximum working pressure: PN16 / 16 bar

Working temperature: 0°C - +70°C


Color RAL5015

Powder epoxy coating 250 µm thickness



FLANGE ADAPTORS AND COUPLINGS

DN	Flange drilling	DE	H	D	D1	KG	BLUCAST ref. no.
50	PN10/16	63	45	165	125	2.5	AQZ050063
60-65	PN10/16	63	45	185	125	2.5	AQZ065063
60-65	PN10/16	75	45	185	145	2.6	AQZ065075
80	PN10/16	90	53	200	160	3.3	AQZ080090
100	PN10/16	110	56	220	180	3.5	AQZ100110
125	PN10/16	125	60	250	210	4	AQZ125125
150	PN10/16	160	69	285	240	6.2	AQZ150160
200	PN10	200	74	340	295	8.5	AQZ200200
200	PN10	225	74	340	295	8.7	AQZ200225
250	PN10	250	85	400	355	9	AQZ250250
300	PN10	315	95	455	410	11	AQZ300315
400	PN10	400	105	565	515	14	AQZ400400

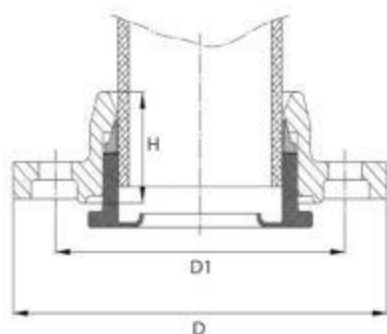

No.	Item	Material
1	Body	Ductile iron EN-GJS-500-7
2	Locking ring	Brass
3	Sealing gasket	EPDM