
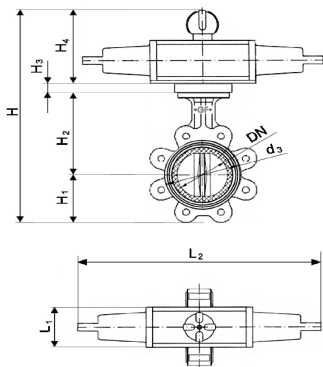


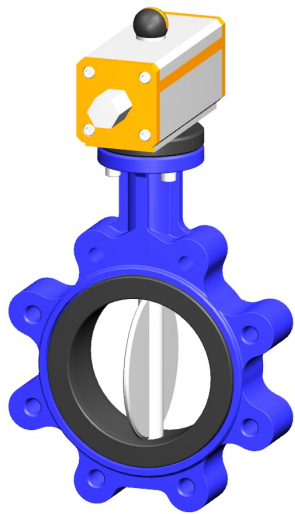

Lug-Style, end Installation butterfly valve metal type 038
With pneumatic actuator - double acting (DA)
Flange standard metric - PN10
Disc: alu-bronze

Model:

- Lug Style
- Body GGG40 (A 395 / A395 M-99, EN-JIS 1020 EN1563) Rilsan® coating
- Installation length: EN 558 row 20
- Interface according to DIN EN ISO 5211
- Pressure range: 16 bar (DN 50-300); 10 bar (DN 350-600)
- Axis DN50 - DN300: Single-piece axis with square profile, material stainless steel DIN Norm 1.4021
- Flange connection: DN50 - DN300: PN6, PN10, ANSI 125/150 Lbs., BS 10-D/E

Option:

- Other liner material on request

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value (Δp=1 bar) (l/min)	Liner: EPDM Code	SP	Weight (kg)
63	50	2	10	3140	199 038 295	1	5.87
75	65	2 ½	10	4570	199 038 296	1	6.97
90	80	3	10	7140	199 038 297	1	8.67
110	100	4	10	11710	199 038 298	1	12.96
140	125	5	10	18570	199 038 299	1	14.76
160	150	6	10	27130	199 038 300	1	20.85
225	200	8	10	47130	199 038 301	1	29.67
280	250	10	10	77110	199 038 302	1	47.40
315	300	12	10	114240	199 038 303	1	67.05

d (mm)	Type of actuator	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	L1 (mm)	L2 (mm)
63	PA-35	321	63	140	15	103	65	183
75	PA-35	343	73	152	15	103	65	183
90	PA-35	365	81	159	12	113	72	183
110	PA-45	420	97	178	15	130	80	225
140	PA-45	455	112	191	12	140	90	225
160	PA-55	487	122	203	12	150	100	269
225	PA-60	580	149	245	12	174	124	314
280	PA-65	672	203	275	20	174	124	336
315	PA-70	774	241	315	20	198	145	365

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>