

**PROGEF Standard Diaphragm valve DIASTAR Ten
FO (Fail safe to open)
Unions with fusion sockets metric**

Model:

- Material: PP-H
- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Rotating air connection at 90° intervals
- For easy installation and removal
- Short overall length


Option:

- Individual configuration of the valve
- Comprehensive range of accessories available

* PN: PTFE

Working Pressure: **one side**

* O-Ring material: FKM

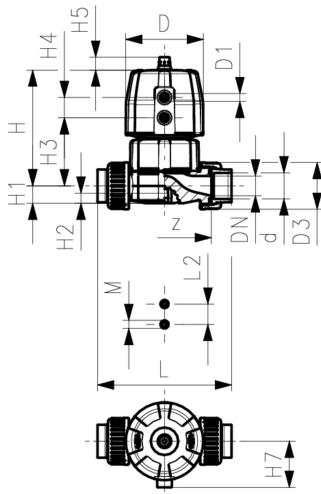

d	DN	Size	PN	PN*	kv-value	EPDM	Weight	PTFE/	Weight
(mm)	(mm)	(inch)	(bar)	(bar)	(Δp=1 bar)	Code	(kg)	EPDM*	(kg)
					(l/min)			Code	
20	15	½	10	10*	125	167 644 012	0.469	167 644 032	0.515
25	20	¾	10	10*	271	167 644 013	0.908	167 644 033	0.920
32	25	1	10	10*	481	167 644 014	1.070	167 644 034	1.079
40	32	1 ¼	10	10*	759	167 644 015	1.706	167 644 035	1.726
50	40	1 ½	10	10*	1263	167 644 016	3.503	167 644 036	3.533
63	50	2	10	10*	1728	167 644 017	4.238	167 644 037	4.266

d	D	D1_G	H	H1	H2	H3	H4	H5	H7	L	L2	M	z	Lift = Hx
(mm)	(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)	(mm)
20	68	¾	101	14	12	60	24	16	43	128	25	M6	96	7
25	96	¾	132	18	12	73	25	16	57	150	25	M6	114	10
32	96	¾	143	22	12	84	25	16	57	162	25	M6	122	13
40	120	¾	173	26	15	99	26	26	69	184	45	M8	140	15
50	150	¾	214	32	15	119	36	26	88	210	45	M8	160	19
63	150	¾	226	39	15	132	36	26	88	248	45	M8	190	23

d	closest
(mm)	inch
	(inch)
20	¾
25	¾
32	1
40	1 ¼
50	1 ½
63	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>