


COOL-FIT 2.0 Flexible hose



Model:

- EPDM flexible hose with stainless steel protection
- Brass adaptors
- Pre-Insulation made from NBR foam with outer jacket impact resistant and tearproof
- With loose union nut G on one end and male thread GA on the other

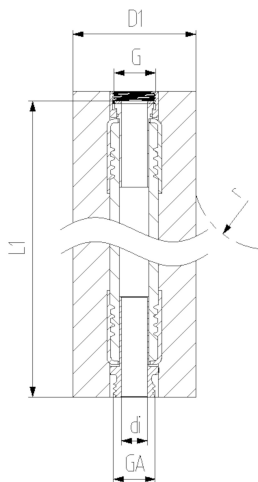

d	D1	Thread	Size	DN	PN	Code	di	L1	r
(mm)	(mm)		(inch)	(mm)	(bar)		(mm)	(mm)	(mm)
20	39	G/GA	½	15	10	738 924 206	15	1000	119
25	44	G/GA	¾	20	10	738 924 207	19	1000	156
32	51	G/GA	1	25	10	738 924 208	25	1000	192
40	59	G/GA	1 ¼	32	8	738 924 209	32	1500	252
50	69	G/GA	1 ½	40	6	738 924 210	38	2000	312
63	82	G/GA	2	50	6	738 924 211	52	2000	372

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>