


Wafer-Style, intermediate installation butterfly valve metal type 039
With pneumatic actuator - double acting (DA)
Flange standard Metric/Inch/ASTM - PN10
Disc: stainless steel DIN Norm 1.4408 without coating

Model:

- Wafer Style
- Body GGG40 (A 395 / A395 M-99, EN-JIS 1020 EN1563) Rilsan® coating
- Installation length: EN 558 row 20
- Interface according to DIN EN ISO 5211
- Pressure range: 10 bar (DN 50-200); 6 bar (DN 250); 4 bar (DN 300 - 600)
- Axis DN50 - DN300: Single-piece axis with square profile, material stainless steel DIN Norm 1.4021
- Flange connection: DN50 - DN300: PN6, PN10, ANSI 125/150 Lbs., BS 10-D/E
- Mounting between ISO, ANSI, BS or JIS Flanges

Option:

- Other liner material on request

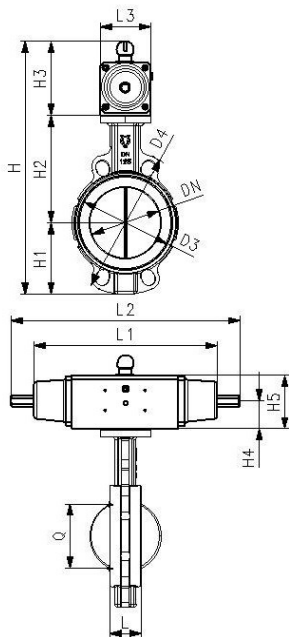

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value (Δp=1 bar) (l/min)	Liner: EPDM Code	PF	Liner: FKM Code	SP	Weight (kg)
63	50	2	10	3167	199 039 304	3 39 226 204	199 039 317	1	5.32
75	65	2 ½	10	4667	199 039 305	3 39 226 204	199 039 318	1	6.02
90	80	3	10	7167	199 039 306	3 39 226 204	199 039 319	1	6.97
110	100	4	10	11833	199 039 307	3 39 226 204	199 039 320	1	9.30
140	125	5	10	18333	199 039 308	3 39 226 204	199 039 321	1	12.36
160	150	6	10	26667	199 039 309	3 39 226 204	199 039 322	1	15.82
225	200	8	10	47130	199 039 310	3 39 226 204	199 039 323	1	24.87
280	250	10	6	78333	199 039 311	3 39 226 204	199 039 324	1	34.17
315	300	12	4	115000	199 039 312	3 39 226 204	199 039 325	1	50.45

d (mm)	Liner: NBR Code
63	199 039 602
75	199 039 603
90	199 039 604
110	199 039 605
140	199 039 606
160	199 039 607
225	199 039 608
280	199 039 609
315	199 039 610

d (mm)	Type of actuator	D3 (mm)	D4 (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H5 (mm)	H6 (mm)	L2 (mm)	L3 (mm)	Q (mm)
63	PA-35	102	165	335	83	140	112	35	60	15	183	60	32
75	PA-35	122	185	357	93	152	112	35	60	15	183	60	51
90	PA-35	139	190	378	98	159	121	38	71	15	183	60	69
110	PA-45	159	229	428	111	178	139	38	71	15	225	72	89
140	PA-45	189	254	467	127	191	149	46	86	15	225	72	115
160	PA-55	214	285	515	143	203	169	46	86	15	269	90	143
225	PA-60	269	343	600	172	245	183	56	106	15	314	100	194
280	PA-65	331	333	652	204	275	173	56	106	25	336	112	243
315	PA-70	380	353	763	242	315	206	68	130	25	365	124	293

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Data sheet

valid from: 3/3/26



Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>