


PROGEF Standard Check valve type 561
Without spring
With socket fusion spigots metric

Model:

- Material: PP-H
- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

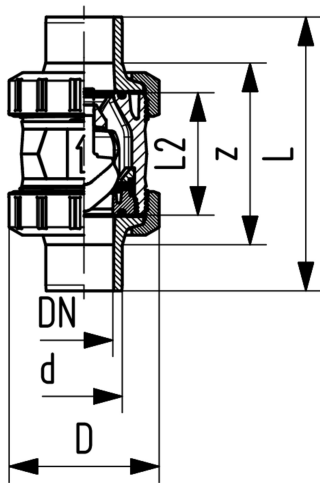

d	DN	Size	PN	kv-value	EPDM	Weight	FKM	Weight
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)	Code	(kg)	Code	(kg)
				(l/min)				
16	10	3/8	10	190	167 561 041	0.080	167 561 051	0.080
20	15	1/2	10	180	167 561 042	0.090	167 561 052	0.090
25	20	3/4	10	380	167 561 043	0.170	167 561 053	0.190
32	25	1	10	460	167 561 044	0.200	167 561 054	0.200
40	32	1 1/4	10	850	167 561 045	0.340	167 561 055	0.350
50	40	1 1/2	10	1080	167 561 046	0.510	167 561 056	0.510
63	50	2	10	1670	167 561 047	0.940	167 561 057	0.950
75	65	2 1/2	10	2950	167 561 048	2.360	167 561 058	2.370
90	80	3	10	3600	167 561 049	3.730	167 561 059	3.750
110	100	4	10	4150	167 561 050	5.960	167 561 060	5.980

d	D	L	L2	closest
(mm)	(mm)	(mm)	(mm)	inch
				(inch)
16	50	110	56	3/8
20	50	120	56	1/2
25	58	139	65	3/4
32	68	150	71	1
40	84	170	85	1 1/4
50	97	190	89	1 1/2
63	124	220	101	2
75	166	280	136	2 1/2
90	200	296	141	3
110	238	336	164	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>