




ABS Check valve type 562
With butt fusion spigots long

Model:

- For horizontal or vertical installation
- 100% leak-tight in the closed/idle state, independent of installation orientation and without hydrostatic head
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

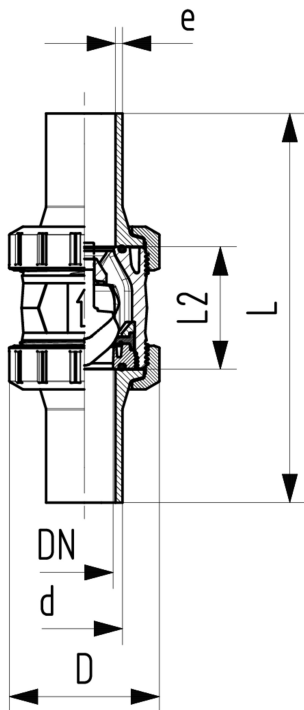

d	DN	PN	kv-value	EPDM	D	L	L2	closest
(mm)	(mm)	(bar)	($\Delta p=1$ bar)	Code	(mm)	(mm)	(mm)	inch
			(l/min)					(inch)
20	15	10	180	169 562 302	50	215	56	½
25	20	10	380	169 562 303	58	224	65	¾
32	25	10	460	169 562 304	68	243	71	1
40	32	10	850	169 562 305	84	276	85	1 ¼
50	40	10	1080	169 562 306	97	315	89	1 ½
63	50	10	1670	169 562 307	124	357	101	2
75	65	10	2950	169 562 308	166	394	136	2 ½
90	80	10	3600	169 562 309	200	431	141	3
110	100	10	4150	169 562 310	238	494	164	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>