




ELGEF Plus Tapping saddle PE100

d63-250 / SDR11 / With 360° rotatable outlet / With gas-stop 0.2 - 5 bar

- 5 bar Gas (for pressures from **200 mbar to 5 bar**)
- With integrated cutter to tap live mains under pressure
- Gas-Stop System Pipelife Type S (GS 32/200 UE or GS 63/200 UE)
- **With overflow orifice**
- Set comes with Gas-Stop pre-assembled
- Installation instructions of Gas-Stop manufacturer are to be observed
- Complete with lower part
- 4 mm pin connectors
- Limited path fusion indicators
- Long fusion outlet
- O-ring-sealed screw cap

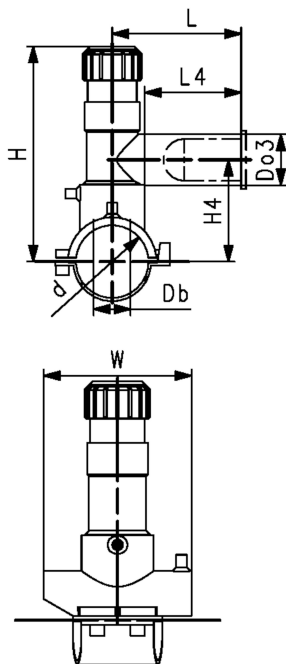


d	Do3	DN	Code	Weight
(mm)	(mm)	(mm)		(kg)
63	32	50	193 130 804	0.715
63	63	50	193 130 837	1.540
75	32	65	193 130 844	0.854
75	63	65	193 130 847	1.680
90	32	80	193 130 854	0.813
90	63	80	193 130 857	1.642
110	32	100	193 130 864	0.877
110	63	100	193 130 867	1.691
125	32	100	193 130 874	0.897
125	63	100	193 130 877	1.709
140	32	125	193 130 884	0.913
140	63	125	193 130 887	1.740
160	32	150	193 130 894	0.909
160	63	150	193 130 897	1.737
180	32	150	193 130 904	1.222
180	63	150	193 130 907	1.843
200	32	200	193 130 914	1.034
200	63	200	193 130 917	1.862
225	32	200	193 130 924	1.027
225	63	200	193 130 927	1.828
250	32	250	193 130 934	1.048
250	63	250	193 130 937	1.876

L	L4	Db	W	H	H4	max Volume	Suitable for
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(l/min)	
130	76	32	164	186	108	750.0	SDR 9-11
160	100	35	164	134	112	3000.0	SDR 9-11
130	76	32	164	191	113	750.0	SDR 9-11
160	100	35	164	240	118	3000.0	SDR 9-11
130	76	32	164	199	121	750.0	SDR 9-11
160	100	35	164	248	126	3000.0	SDR 9-11
130	76	32	164	209	131	750.0	SDR 9-17.6
160	100	35	164	258	136	3000.0	SDR 9-17.6
130	76	32	164	216	138	750.0	SDR 9-17.6
160	100	35	164	265	143	3000.0	SDR 9-17.6
130	76	32	164	233	146	750.0	SDR 9-17.6
160	100	35	164	273	151	3000.0	SDR 9-17.6
130	76	32	164	243	156	750.0	SDR 9-17.6
160	100	35	164	283	161	3000.0	SDR 9-17.6
130	76	32	164	244	166	750.0	SDR 9-26
160	100	35	164	293	171	3000.0	SDR 9-26
130	76	32	165	254	176	750.0	SDR 9-26
160	100	35	165	303	181	3000.0	SDR 9-26

Data sheet

valid from: 4/5/26

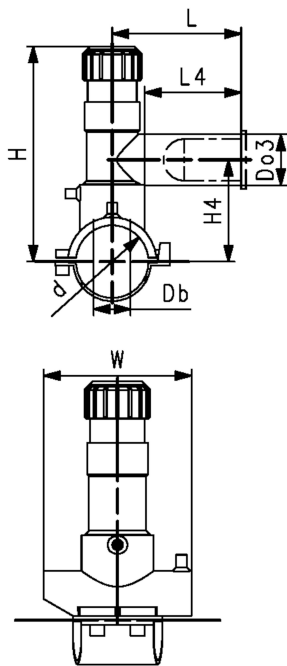

L	L4	Db	W	H	H4	max Volume	Suitable for
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(l/min)	
130	76	32	165	266	188	750.0	SDR 11-26
160	100	35	165	315	193	3000.0	SDR 11-26
130	76	32	165	279	201	750.0	SDR 11-26
160	100	35	165	328	206	3000.0	SDR 11-26

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>