

Diaphragm valve DIASTAR Ten PVC-C
DA (Double acting)
With solvent cement spigots metric

Model:

- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Rotating air connection at 90° intervals
- Overall length EN 558


Option:

- Individual configuration of the valve
- Comprehensive range of accessories available

* PN: PTFE

Working Pressure: **one side**

* O-Ring material: FKM

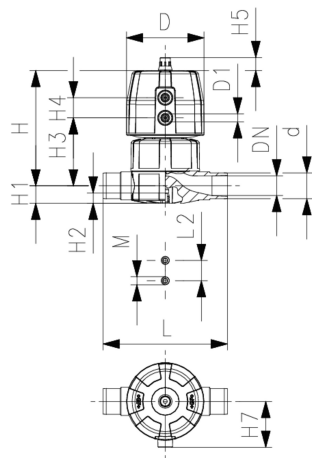

d	DN	Size	PN	PN*	kv-value	EPDM	SP	Weight
(mm)	(mm)	(inch)	(bar)	(bar)	(Δp=1 bar)	Code		(kg)
					(l/min)			
20	15	½	10	10*	125	163 655 012	1	0.473
25	20	¾	10	10*	271	163 655 013	1	0.844
32	25	1	10	10*	481	163 655 014	1	1.028
40	32	1 ¼	10	10*	759	163 655 015	1	1.638
50	40	1 ½	10	10*	1263	163 655 016	1	2.762
63	50	2	10	10*	1728	163 655 017	1	3.512

d	PTFE/ EPDM*	SP	Weight
(mm)	Code		(kg)
20	163 655 032	1	0.473
25	163 655 033	1	0.844
32	163 655 034	1	1.049
40	163 655 035	1	1.659
50	163 655 036	1	2.791
63	163 655 037	1	3.540

d	D	D1_G	H	H1	H2	H3	H4	H5	H7	L	L2	M	Lift = Hx	closest inch
(mm)	(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)	(inch)
20	68	⅝	101	14	12	60	24	16	43	124	25	M6	7	½
25	96	⅝	132	18	12	73	25	16	57	144	25	M6	10	¾
32	96	⅝	143	22	12	84	25	16	57	154	25	M6	13	1
40	120	⅝	173	26	15	99	26	26	69	174	45	M8	15	1 ¼
50	150	⅝	214	32	15	119	36	26	88	194	45	M8	19	1 ½
63	150	⅝	226	39	15	132	36	26	88	224	45	M8	23	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>