


Diaphragm valve DIASTAR Six ABS
FC (Fail safe to close)
Unions with solvent cement sockets metric

Model:

- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Rotating air connection at 90° intervals
- For easy installation and removal
- Short overall length

Option:

- Individual configuration of the valve

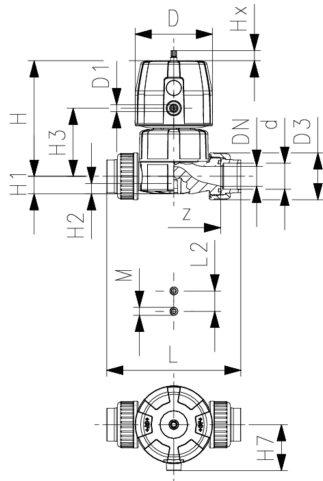

d	DN	Size	PN	kv-value	EPDM	SP	Weight
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)	Code		(kg)
				(l/min)			
25	20	¾	6	271	169 614 013	1	0.986
32	25	1	6	481	169 614 014	1	1.175
40	32	1 ¼	6	759	169 614 015	1	1.977
50	40	1 ½	6	960	169 614 016	1	2.495
63	50	2	6	1181	169 614 017	1	3.460

d	D	D1_G	H	H1	H2	H3	H7	L	L2	M	z	Lift = Hx	closest
(mm)	(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)	(mm)	inch
													(inch)
25	96	¾	132	18	12	73	57	152	25	M6	114	10	¾
32	96	¾	143	22	12	84	57	166	25	M6	122	13	1
40	120	¾	173	26	15	99	69	192	45	M8	140	14	1 ¼
50	120	¾	193	32	15	119	69	222	45	M8	160	16	1 ½
63	120	¾	205	39	15	132	69	266	45	M8	190	16	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>