


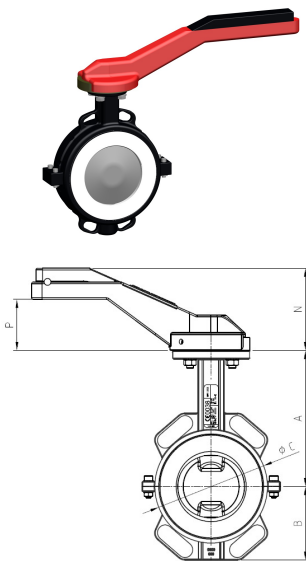

Wafer-Style metal butterfly valve type 044
With hand lever
Flange standard metric - PN10
Disc: Stainless steel with PFA encapsulated

Model:

- Wafer Style
- Body: ductile iron ASTM A395
- Installation length: EN 558 row 20
- Interface according to DIN EN ISO 5211
- From vacuum to 16 bar (depending on DN and temperature)
- Intermediate flange DIN ISO PN10/16 and ANSI 150 LBS
- Disc PFA encapsulated, liner PTFE with silicon backing ring

Option:

- Electric and pneumatic actuator on request
- Other liner material on request

Note:

Hand lever DN125, DN150 and DN200 with 10 grid positions

d	DN	PN	Size	kv-value	Weight	Code	PF
(mm)	(mm)	(bar)	(inch)	($\Delta p=1$ bar)	(kg)		
				(l/min)			
63	50	16	2	3167	3.50	199 044 000	3 39 226 301
75	65	16	2 ½	4667	4.20	199 044 001	3 39 226 301
90	80	16	3	7167	4.70	199 044 002	3 39 226 301
110	100	16	4	11833	5.90	199 044 003	3 39 226 301
140	125	16	5	18333	7.60	199 044 004	3 39 226 301
160	150	16	6	26667	8.80	199 044 005	3 39 226 301

d	H	H1	H2	H3	L	L2
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
63	287	57	135	95	43	220
75	303	63	145	95	46	220
90	340	86	159	95	46	220
110	374	104	175	95	52	220
140	403	118	190	95	56	320
160	430	132	203	95	56	320

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>