



3-Way ball valve type 543 Pro ABS
Vertical/L-port
With solvent cement sockets metric

Model:





- Lockable lever as standard (DN10-DN50)
- For easy installation and removal
- Ball seat PTFE
- Vertical inlet solvent cement spigot metric
- Integrated stainless steel mounting inserts
- Angle of operation 360° without turn limiter
- Turn limiter 90° enclosed, in different positions usable as a clip-on ring
- Delivery status A-C opened, see flow scheme
- Z-dimension, valve end and union nut are compatible with type 543 (1stGeneration)

Mode of action:

- For interconnection of two inputs

Option:

- Interface-module with position feedback sensor, incl. LED feedback (DN10-50)
- Manual spring return lever ("Dead man") (DN10-25)
- Pneumatic or electric actuators from GF
- Individual configuration of the valve possible

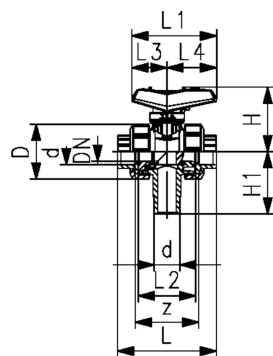

d	DN	PN	kv-value	EPDM	SP	Weight
(mm)	(mm)	(bar)	($\Delta p=1$ bar)	Code		(kg)
			(l/min)			
16	10	10	49	169 543 401	1	0.124
20	15	10	77	169 543 402	1	0.123
25	20	10	146	169 543 403	1	0.194
32	25	10	260	169 543 404	1	0.284
40	32	10	437	169 543 405	1	0.475
50	40	10	667	169 543 406	1	0.676
63	50	10	1293	169 543 407	1	1.234

d	D	H	H1	L	L1	L2	L3	L4	z	closest
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	inch
										(inch)
16	50	61	62	92	82	56	32	45	64	$\frac{3}{8}$
20	50	61	62	95	82	56	32	45	64	$\frac{1}{2}$
25	58	74	72	111	106	66	39	58	74	$\frac{3}{4}$
32	68	80	77	123	106	71	39	58	79	1
40	84	95	87	146	131	85	54	74	95	1 $\frac{1}{4}$
50	97	102	97	157	131	89	54	74	95	1 $\frac{1}{2}$
63	124	117	112	183	152	101	66	87	107	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.