
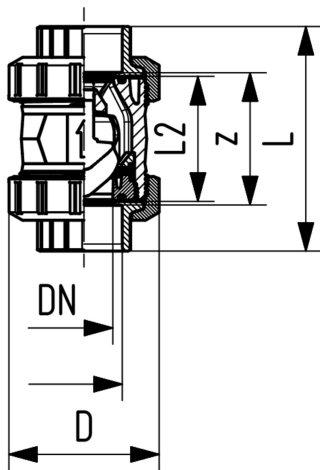




Check valve type 562 PVC-C With threaded sockets Rp

Model:

- For horizontal or vertical installation
- 100% leak-tight in the closed/idle state, independent of installation orientation and without hydrostatic head
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

d (mm)	Rp (inch)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	SP	Weight (kg)	FKM Code	SP	Weight (kg)
16	3/8	10	10	190	163 562 021	1	0.120	163 562 031	1	0.120
20	1/2	15	10	180	163 562 022	1	0.120	163 562 032	1	0.120
25	3/4	20	10	380	163 562 023	1	0.260	163 562 033	1	0.280
32	1	25	10	460	163 562 024	1	0.290	163 562 034	1	0.290
40	1 1/4	32	10	850	163 562 025	1	0.490	163 562 035	1	0.500
50	1 1/2	40	10	1080	163 562 026	1	0.740	163 562 036	1	0.750
63	2	50	10	1670	163 562 027	1	1.530	163 562 037	1	1.530
75	2 1/2	65	10	2950	163 562 028	1	3.530	163 562 038	1	3.550
90	3	80	10	3600	163 562 029	1	5.670	163 562 039	1	5.700
110	4	100	10	4150	163 562 030	1	8.990	163 562 040	1	9.030

D (mm)	L (mm)	L2 (mm)	z (mm)
50	95	56	69
50	100	56	67
58	114	65	78
68	127	71	85
84	146	85	100
97	152	89	106
124	177	101	121
166	233	136	144
200	254	141	151
238	301	164	174

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>