




ELGEF Plus Tapping saddle PE100

d63-250mm / SDR11 / With 360° rotatable outlet / With gas-stop 0.025 - 1.0 bar

- 1 bar Gas (for pressures from **25 mbar to 1 bar**)
- With integrated cutter to tap live mains under pressure
- Gas-Stop System Pipelife Type AD (GS 32/25 UE or GS 63/25 UE)
- **With overflow orifice**
- Set comes with Gas-Stop pre-assembled
- Installation instructions of Gas-Stop manufacturer are to be observed
- Complete with lower part
- 4 mm pin connectors
- Limited path fusion indicators
- Long fusion outlet
- O-ring-sealed screw cap

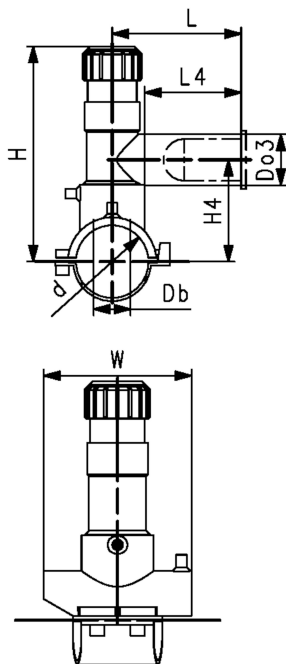


d (mm)	Do3 (mm)	DN (mm)	Code	Weight (kg)
63	32	50	193 130 604	0.728
63	63	50	193 130 637	1.556
75	32	65	193 130 644	0.854
75	63	65	193 130 647	1.680
90	32	80	193 130 654	0.814
90	63	80	193 130 657	1.642
140	32	100	193 130 664	0.884
125	63	100	193 130 667	1.691
125	32	100	193 130 674	0.902
125	63	100	193 130 677	1.724
140	32	125	193 130 684	0.913
140	63	125	193 130 687	1.740
160	32	150	193 130 694	0.909
160	63	150	193 130 697	1.737
180	32	150	193 130 704	1.015
180	63	150	193 130 707	1.843
200	32	200	193 130 714	1.034
200	63	200	193 130 717	1.862
225	32	200	193 130 724	1.027
225	63	200	193 130 727	1.864
250	32	250	193 130 734	1.048
250	63	250	193 130 737	1.876

L (mm)	L4 (mm)	Db (mm)	W (mm)	H (mm)	H4 (mm)	max Volume (l/min)	Suitable for
130	76	32	164	186	108	166.6	SDR Pipe 9-11
160	100	32	164	134	112	666.6	SDR Pipe 9-11
130	76	32	164	191	113	166.6	SDR Pipe 9-11
160	100	32	164	240	118	666.6	SDR Pipe 9-11
130	76	32	164	199	121	166.6	SDR Pipe 9-11
160	100	32	164	248	126	666.6	SDR Pipe 9-11
130	76	32	164	209	131	166.6	SDR Pipe 9-17.6
160	100	35	164	258	136	666.6	SDR Pipe 9-17.6
130	76	32	164	216	138	166.6	SDR Pipe 9-17.6
160	100	35	164	265	143	666.6	SDR Pipe 9-17.6
130	76	32	164	233	146	166.6	SDR Pipe 9-17.6
160	100	35	164	273	151	666.6	SDR Pipe 9-17.6
130	76	32	164	243	156	166.6	SDR Pipe 9-17.6
160	100	35	164	283	161	666.6	SDR Pipe 9-17.6
130	76	32	164	244	166	166.6	SDR Pipe 9-26
160	100	35	164	293	171	666.6	SDR Pipe 9-26
130	76	32	165	254	176	166.6	SDR Pipe 9-26
160	100	35	165	303	181	666.6	SDR Pipe 9-26

Data sheet

valid from: 10/9/26

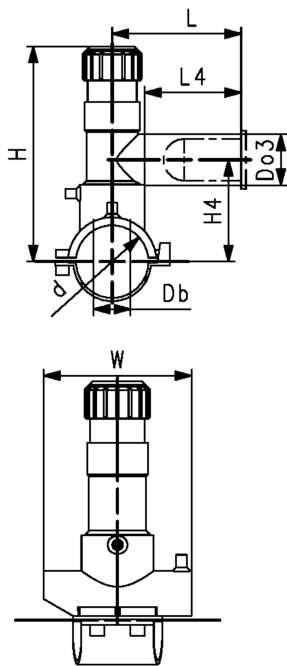

L	L4	Db	W	H	H4	max Volume	Suitable for
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(l/min)	
130	76	32	165	266	188	166.6	SDR Pipe 11-26
160	100	35	165	315	193	666.6	SDR Pipe 11-26
130	76	32	165	279	201	166.6	SDR Pipe 11-26
160	100	35	165	328	206	666.6	SDR Pipe 11-26

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>