




COOL-FIT 2.0 Ball valve hand-operated


Model:

- Material: PVC-U with spigot PE100 SDR11, metric
- Ball seals type 542-PE/ blue lever ; type 546 PTFE/ red lever
- Integrated stainless steel mounting inserts for type 546
- Including insulation half shells


d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (L/min)	Code	Weight (kg)
32	25	16	700	138 541 308	0.550
40	32	16	1000	138 541 309	0.892
50	40	16	1600	138 541 310	1.187
63	50	16	3100	138 541 311	2.153
75	65	16	5000	138 546 312	5.550
90	80	16	7000	138 546 313	8.150



d (mm)	D (mm)	D1 (mm)	D2 (mm)	H (mm)	H1 (mm)	H2 (mm)	L (mm)	L1 (mm)	L3 (mm)	L4 (mm)	L5 (mm)	L6 (mm)	M	z (mm)	z1 (mm)
32	135	97	82	97	34		152	36	93		34	59		223	76
40	157	117	97	114	42		170	40	110		41	69		249	82
50	169	117	97	120	49		184	44	180		41	69		271	91
63	204	132	117	141	62		227	48	128		49	79		321	110
75	235	147	132	194	85	15	276	55	270	70	64	206	M8	386	125
90	255	168	147	200	105	15	297	62	270	70	64	206	M8	421	140

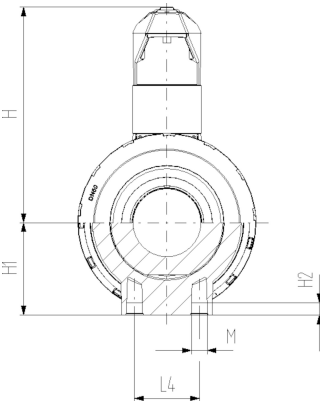

d (mm)	z2 (mm)	Type
32	71	542
40	85	542
50	89	542
63	101	542
75	136	546
90	141	546



The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>