

**Diaphragm valve DIASTAR TenPlus ABS
FC (Fail safe to close)
Unions with solvent cement sockets metric**

Model:


- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Rotating air connection at 90° intervals
- For easy installation and removal
- Short overall length

Option:

- Individual configuration of the valve
- Comprehensive range of accessories available

* PN: PTFE

Working Pressure: **both sides**

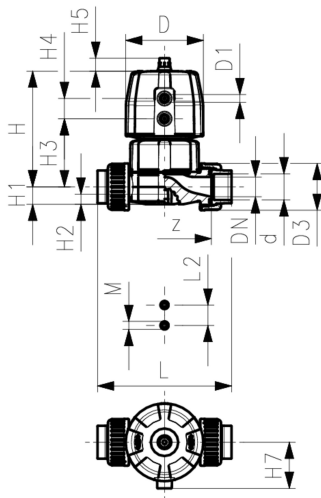

d	DN	Size	PN	PN*	kv-value	EPDM	SP	Weight
(mm)	(mm)	(inch)	(bar)	(bar)	(Δp=1 bar)	Code		(kg)
					(l/min)			
20	15	½	10	10*	125	169 684 012	1	0.949
25	20	¾	10	10*	271	169 684 013	1	1.061
32	25	1	10	10*	481	169 684 014	1	1.841
40	32	1 ¼	10	10*	759	169 684 015	1	3.197
50	40	1 ½	10	10*	1263	169 684 016	1	5.041
63	50	2	10	10*	1728	169 684 017	1	5.788

d	D	D1_G	H	H1	H2	H3	H4	H5	H7	L	L2	M	z	Lift = Hx
(mm)	(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)	(mm)
20	96	⅝	127	14	12	68	25	16	57	128	25	M6	96	7
25	96	⅝	132	18	12	73	25	16	57	152	25	M6	114	10
32	120	⅝	167	22	12	93	26	26	69	166	25	M6	122	13
40	150	¾	196	26	15	101	36	26	88	192	45	M8	140	15
50	180	¾	239	32	15	124	37	26	103	222	45	M8	160	19
63	180	¾	251	39	15	137	37	26	103	266	45	M8	190	23

d	closest inch
(mm)	(inch)
20	¾
25	¾
32	1
40	1 ¼
50	1 ½
63	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>