



Lug-Style, end installation butterfly valve metal type 038
With hand lever
Flange standard metric - PN10
Disc: alu-bronze

Model:


- Lug Style
- Body GGG40 (A 395 / A395 M-99, EN-JIS 1020 EN1563) Rilsan® coating
- Installation length: EN 558 row 20
- Interface according to DIN EN ISO 5211
- Pressure range: 16 bar (DN 50-300)
- Axis DN50 - DN300: Single-piece axis with square profile, material stainless steel DIN Norm 1.4021
- Flange connection: DN50 - DN300: PN6, PN10, ANSI 125/150 Lbs., BS 10-D/E

Option:

- Electric and pneumatic actuator on request
- Other liner material on request

Note:

Hand lever DN125, DN150 and DN200 with 10 grid positions

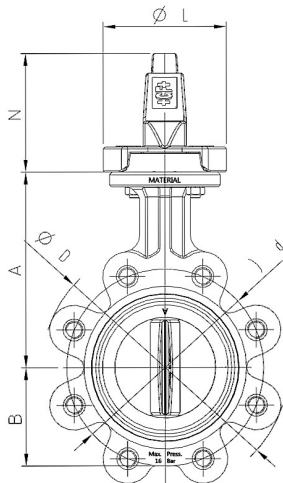

d (mm)	DN (mm)	Size (inch)	PN (bar)	kv-value ($\Delta p=1$ bar) (L/min)	Liner: EPDM Code	PF	SP	Weight (kg)	Liner: FKM Code
63	50	2	16	3140	199 038 400	3 39 226 101	1	3.90	199 038 413
75	65	2 ½	16	4570	199 038 401	3 39 226 101	1	5.00	199 038 414
90	80	3	16	7140	199 038 402	3 39 226 101	1	6.70	199 038 415
110	100	4	16	11710	199 038 403	3 39 226 101	1	8.70	199 038 416
140	125	5	16	18570	199 038 404	3 39 226 101	1	10.60	199 038 417
160	150	6	16	27130	199 038 405	3 39 226 101	1	12.30	199 038 418
225	200	8	16	47130	199 038 406	3 39 226 101	1	19.10	199 038 419

d (mm)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	L (mm)	L1 (mm)	L2 (mm)
63	298	63	140	95	43	45	220
75	320	73	152	95	46	45	220
90	335	81	159	95	46	45	220
110	370	97	178	95	52	45	220
140	398	112	181	95	56	45	320
160	420	122	203	95	56	45	320
225	489	149	245	95	60	45	320

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>