



3-Way ball valve type 543 Pro ABS
Vertical/L-port
With threaded sockets Rp

Model:





- Lockable lever as standard (DN10-DN50)
- For easy installation and removal
- Ball seat PTFE
- Vertical inlet solvent cement spigot metric
- Angle of operation 360° without turn limiter
- Turn limiter 90° enclosed, in different positions usable as a clip-on ring
- Integrated stainless steel mounting inserts
- Delivery status A-C opened, see flow scheme
- Z-dimension, valve end and union nut are compatible with type 543 (1stGeneration)

Mode of action:

- For interconnection of two inputs

Option:

- Interface-module with position feedback sensor, incl. LED feedback (DN10-50)
- Manual spring return lever ("Dead man") (DN10-25)
- Pneumatic or electric actuators from GF
- Individual configuration of the valve possible

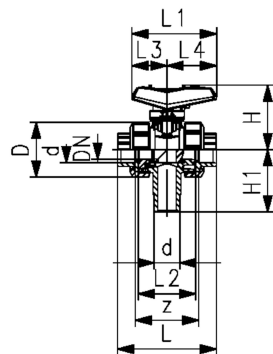

d	DN	Thread Type	Size	PN	kv-value	EPDM	SP	Weight
(mm)	(mm)		(inch)	(bar)	($\Delta p=1$ bar)	Code		(kg)
					(L/min)			
16	10	Rp	3/8	10	49	169 543 421	1	0.124
20	15	Rp	1/2	10	77	169 543 422	1	0.127
25	20	Rp	3/4	10	146	169 543 423	1	0.194
32	25	Rp	1	10	260	169 543 424	1	0.284
40	32	Rp	1 1/4	10	437	169 543 425	1	0.475
50	40	Rp	1 1/2	10	667	169 543 426	1	0.676
63	50	Rp	2	10	1293	169 543 427	1	1.234

D	H	H1	L	L1	L2	L3	L4	z
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)
50	61	62	96	82	56	32	45	69
50	61	62	99	82	56	32	45	67
58	74	72	115	106	66	39	58	78
68	80	77	127	106	71	39	58	85
84	95	87	144	131	85	54	74	100
97	102	97	153	131	89	54	74	106
124	117	112	177	152	101	66	87	121

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.