
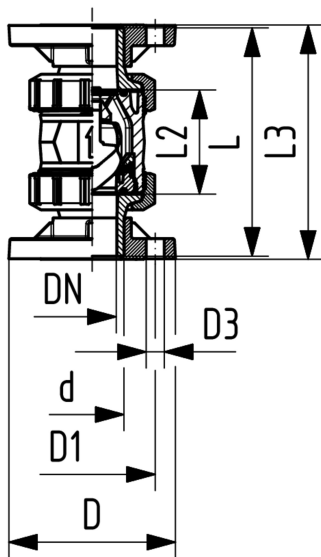




PROGEF Standard Check valve type 562 With fixed flanges metric

Model:

- Material: PP-H
- For horizontal or vertical installation
- 100% leak-tight in the closed/idle state, independent of installation orientation and without hydrostatic head
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Installation length according to EN 558-1
- Z-length, end connectors and union nuts **not** compatible with type 360
- Connecting dimension: ISO 7005 PN10, EN 1092 PN10, DIN 2501 PN10

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	Weight (kg)	FKM Code	Weight (kg)
20	15	10	180	167 562 182	0.220	167 562 192	0.220
25	20	10	380	167 562 183	0.340	167 562 193	0.350
32	25	10	460	167 562 184	0.440	167 562 194	0.440
40	32	10	850	167 562 185	0.730	167 562 195	0.730
50	40	10	1080	167 562 186	0.970	167 562 196	0.970
63	50	10	1670	167 562 187	1.600	167 562 197	1.600

d (mm)	D (mm)	D1 (mm)	D3 (mm)	L (mm)	L2 (mm)	L3 (mm)	closest inch (inch)
20	95	65	14	120	56	130	½
25	105	75	14	140	65	150	¾
32	115	85	14	150	71	160	1
40	140	100	18	170	85	180	1 ¼
50	150	110	18	190	89	200	1 ½
63	165	125	18	220	101	230	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>