
Data sheet

valid from: 3/27/26



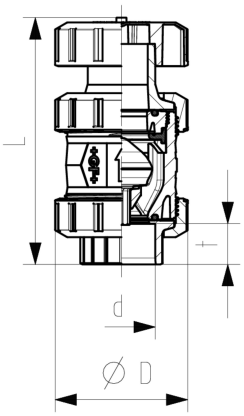

Ventilating and bleed valve Type 591 PVC-C
With solvent cement sockets metric

Model:

- With protection cap up to DN50 made of PP-GF, DN65-100 made of POM
- Floater made of PP-H
- Designed for easy installation and removal
- Compact installation length

d (mm)	DN (mm)	PN (bar)	EPDM Code	FKM Code	D (mm)	L (mm)	t (mm)	closest inch (inch)
16	10	16	**163 591 001**	**163 591 011**	50	118	14	⅜
20	15	16	**163 591 002**	**163 591 012**	50	124	16	½
25	20	16	**163 591 003**	**163 591 013**	58	142	19	¾
32	25	16	**163 591 004**	**163 591 014**	68	157	22	1
40	32	16	**163 591 005**	**163 591 015**	84	179	26	1 ¼
50	40	16	**163 591 006**	**163 591 016**	97	197	31	1 ½
63	50	16	**163 591 007**	**163 591 017**	124	229	38	2
75	65	16	**163 591 008**	**163 591 018**	166	258	45	2 ½
90	80	16	**163 591 009**	**163 591 019**	200	277	52	3
110	100	16	**163 591 010**	**163 591 020**	238	320	64	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/SwitzerlandPhone +41 -(0)52-631 1111e-mail: info.ps@georgfischer.comInternet: http://www.gfps.com