
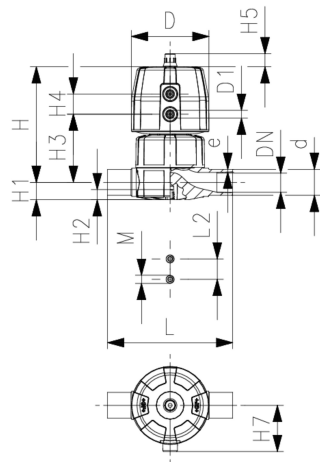


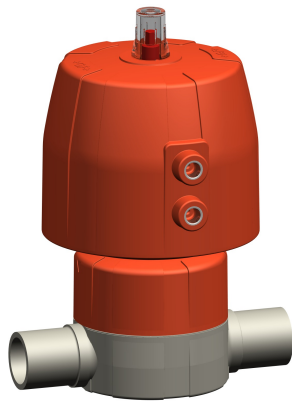

**PROGEF Standard Diaphragm valve DIASTAR Ten
DA (Double acting)
With butt fusion spigots SDR11 metric**

Model:

- Material: PP-H
- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Rotating air connection at 90° intervals

Option:

- Individual configuration of the valve
- Comprehensive range of accessories available

* PN: PTFE

Working Pressure: **one side**

* O-Ring material: FKM

d (mm)	DN (mm)	Size (inch)	PN (bar)	PN* (bar)	kv-value (Δp=1 bar) (l/min)	EPDM Code	Weight (kg)	PTFE/ EPDM* Code	Weight (kg)
20	15	½	10	10*	125	167 655 112	0.425	167 655 132	0.435
25	20	¾	10	10*	271	167 655 113	0.765	167 655 133	0.776
32	25	1	10	10*	481	167 655 114	0.924	167 655 134	0.944
40	32	1 ¼	10	10*	759	167 655 115	1.473	167 655 135	1.493
50	40	1 ½	10	10*	1263	167 655 116	2.500	167 655 136	2.530
63	50	2	10	10*	1728	167 655 117	3.059	167 655 137	3.087

d (mm)	D (mm)	D1_G (inch)	H (mm)	H1 (mm)	H2 (mm)	H3 (mm)	H4 (mm)	H5 (mm)	H7 (mm)	L (mm)	L2 (mm)	M (mm)	e (mm)	Lift = Hx (mm)
20	68	⅝	101	14	12	60	24	16	43	124	25	M6	1.9	7
25	96	⅝	132	18	12	73	25	16	57	144	25	M6	2.3	10
32	96	⅝	143	22	12	84	25	16	57	154	25	M6	2.9	13
40	120	⅝	173	26	15	99	26	26	69	174	45	M8	3.7	15
50	150	⅝	214	32	15	119	36	26	88	194	45	M8	4.6	19
63	150	⅝	226	39	15	132	36	26	88	224	45	M8	5.8	23

d (mm)	closest inch (inch)
20	¾
25	⅝
32	1
40	1 ¼
50	1 ½
63	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>