
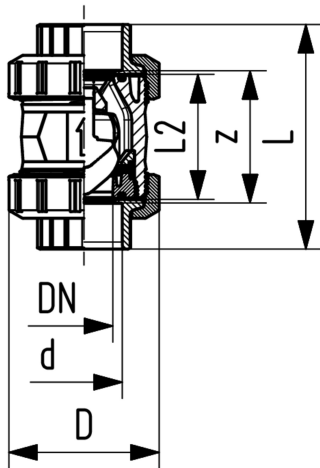




PROGEF Standard Check valve type 561

Without spring

With fusion sockets metric

Model:

- Material: PP-H
- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

d	DN	Size	PN	kv-value	EPDM	Weight	FKM	Weight
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)	Code	(kg)	Code	(kg)
				(l/min)				
16	10	3/8	10	190	167 561 001	0.080	167 561 011	0.080
20	15	1/2	10	180	167 561 002	0.083	167 561 012	0.080
25	20	3/4	10	380	167 561 003	0.128	167 561 013	0.180
32	25	1	10	460	167 561 004	0.200	167 561 014	0.190
40	32	1 1/4	10	850	167 561 005	0.332	167 561 015	0.340
50	40	1 1/2	10	1080	167 561 006	0.498	167 561 016	0.480
63	50	2	10	1670	167 561 007	0.941	167 561 017	0.974
75	65	2 1/2	10	2950	167 561 008	2.300	167 561 018	2.310
90	80	3	10	3600	167 561 009	3.560	167 561 019	3.580
110	100	4	10	4150	167 561 010	5.900	167 561 020	5.930

d	D	L	L2	z	closest
(mm)	(mm)	(mm)	(mm)	(mm)	inch
					(inch)
16	50	93	56	67	3/8
20	50	95	56	66	1/2
25	58	109	65	77	3/4
32	68	119	71	83	1
40	84	135	85	99	1 1/4
50	97	147	89	105	1 1/2
63	124	168	101	117	2
75	166	233	136	167	2 1/2
90	200	254	141	180	3
110	238	301	164	215	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>