




PROGEF Standard Ventilating and bleed valve type 591
With socket fusion spigots metric

Model:

- Material: PP-H
- With protection cap up to DN50 made of PP-GF, DN65-100 made of POM
- Floater made of PP-H
- Designed for easy installation and removal
- Compact installation length

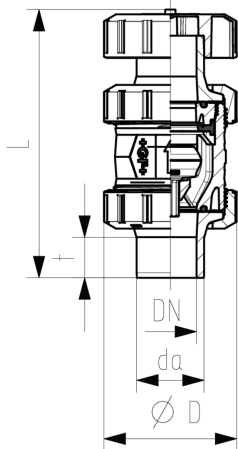

d	SDR	DN	PN	EPDM	FKM	D	L	t	closest
(mm)		(mm)	(bar)	Code	Code	(mm)	(mm)	(mm)	inch
									(inch)
16	11	10	10	167 591 041	167 591 051	50	135	13	3/8
20	11	15	10	167 591 042	167 591 052	50	140	14	1/2
25	11	20	10	167 591 043	167 591 053	58	157	16	3/4
32	11	25	10	167 591 044	167 591 054	68	168	18	1
40	11	32	10	167 591 045	167 591 055	84	189	20	1 1/4
50	11	40	10	167 591 046	167 591 056	97	211	23	1 1/2
63	11	50	10	167 591 047	167 591 057	124	245	27	2
75	11	65	10	167 591 048	167 591 058	166	280	48	2 1/2
90	11	80	10	167 591 049	167 591 059	200	296	49	3
110	11	100	10	167 591 050	167 591 060	238	336	54	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>