


PVC-U Multilayer Pipe SN2 (SDR 51), Plain-Ended (KGGL)

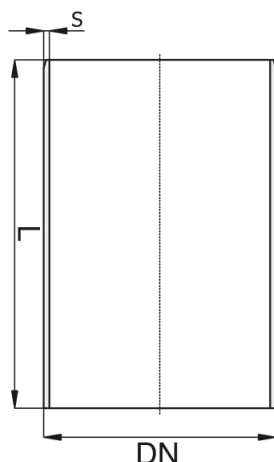

Material	PVC-U, multilayer (co-extruded) wall
Standard	SR EN 13476-1,2
Ring stiffness	SN2 (SDR 51)
Colour	Orange (RAL 8023)
Application	Non-pressure underground sewage and rainwater drainage outside buildings
Joining	Plain ends (no socket)
Temperature	Max. 60 °C for D 110-200; 40 °C for D 250-500 (60 °C short-term)
Chemical resistance	pH 2 - pH 12
Service life	Minimum 50 years

Code	D (mm)	s (mm)	SN	Lm (mm)
V93160032N01000OR	160	3.2	2	1
V93160032N01000OR	160	3.2	2	2
V93160032N06000OR	160	3.2	2	6
V93200039N01000OR	200	3.9	2	1
V93200039N02000OR	200	3.9	2	2
V93200039N06000OR	200	3.9	2	6
V93250049FM1000OR	250	4.9	2	1
V93250049FM2000OR	250	4.9	2	2
V93250049FM6000OR	250	4.9	2	6
V93315062FM01000OR	315	6.2	2	1
V93315062FM02000OR	315	6.2	2	2
V93315062FM06000OR	315	6.2	2	6
V93400079FM01000OR	400	7.9	2	1
V93400079FM02000OR	400	7.9	2	2
V93400079FM06000OR	400	7.9	2	6

Dimensions as published by the manufacturer; symbols refer to the drawing above.
Mainly used as a shaft for the sewer line inspection chambers.