
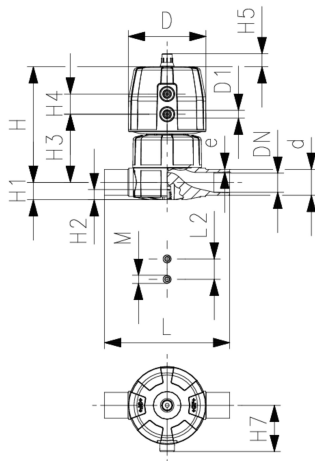




**SYGEF Standard Diaphragm valve DIASTAR Ten
DA (Double acting)
With butt fusion spigots metric**

Model:

- Material: PVDF
- Double flow rate compared to predecessor
- One housing nut replaces four screws
- Rotating air connection at 90° intervals

Option:

- Individual configuration of the valve
- Comprehensive range of accessories available

Working Pressure: **one side**

d (mm)	DN (mm)	kv-value ($\Delta p=1$ bar) (L/min)	PTFE/ EPDM* Code	SP	Weight (kg)
20	15	125	185 655 132	1	0.603
25	20	271	185 655 133	1	0.981
32	25	481	185 655 134	1	1.193
40	32	759	185 655 135	1	1.823
50	40	1263	185 655 136	1	2.986
63	50	1728	185 655 137	1	3.796

D	D1_G	H	H1	H2	H3	H4	H5	H7	L	L2	M	e	Lift = Hx	closest inch
(mm)	(inch)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)		(mm)	(mm)	(inch)
68	1/8	101	14	12	60	24	16	43	124	25	M6	2	7	1/2
96	1/8	132	18	12	73	25	16	57	144	25	M6	2	10	3/4
96	1/8	143	22	12	84	25	16	57	154	25	M6	2	13	1
120	1/8	173	26	15	99	26	26	69	174	45	M8	2	15	1 1/4
150	1/4	214	32	15	119	36	26	88	194	45	M8	3	19	1 1/2
150	1/4	226	39	15	132	36	26	88	224	45	M8	3	23	2

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>