

Multi/Clamp

Damaged water or gas pipes can cause major problems! Damaged pipelines have to be repaired as soon and as safe as possible to prevent the loss of water or gas. So you need a solution that ensures a quick, safe and lasting repair. After all, repairs are costly. We offer you the solution! Our long lasting and maintenance free Multi/Clamp repair clamps repair almost any damaged pipe!

Repair clamps for pipes up to 1000 mm

For each type of damage we offer you the solution

The Multi/Clamp product family consists of wide range repair clamps made of stainless steel, that can repair minor and major damages regardless of the pipe material. Ductile iron, grey cast iron, steel, asbestos cement, all kinds of plastics, the Multi/Clamp product family offers a repair clamp for each pipe material. With Multi/Clamp under pressure or pressureless repairs can easily be done, limiting the loss of water or gas. When repairs are done under pressure the delivery to the end user is not interrupted and the end user does not notice the repair.

The repair clamps consist of one or more clamp sections that are partially or completely covered with a rubber gasket, that seals the leak. Thanks to the clamp sections the repair clamps can be used on pipe diameters from 15 mm up to 1000 mm. All Multi/Clamp products are quick, safe and simple to

install. The stainless steel housing of the clamps is corrosion resistant and long lasting. The Multi/Clamp offers a solution for any type of repair whether under or aboveground.

Fields of application


- Water transport
- Water distribution
- Gas distribution
- Waste water applications
- Maintenance and repair
- Industrial applications

Your benefits

- Quick, safe and simple installation
- Suitable for under pressure and pressureless repairs
- A wide variety of stainless steel repair clamps and saddles
- Corrosion resistant and long lasting thanks to the stainless steel housing
- Suitable for virtually all pipe materials such as steel, AC, (ductile) cast iron and all kinds of plastics
- Applicable for under and aboveground use

Reduce your stock with the Multi/Clamp Combi Box

The Multi/Clamp Combi Box is a repair system. It consists of several shell sections. The shell sections can be combined into one complete repair clamp to do an emergency repair. The biggest advantage of the Multi/Clamp Combi Box is that you can reduce your stock. It consists of 5 shell sections in different dimensions, which allow a repair of pipes in the range of 91 mm – 780 mm. For an emergency repair you have everything at hand. After use the Multi/Clamp Combi Box can be replenished with new shell sections. The shell sections can be ordered separately to complete the Multi/Clamp Combi Box for a future emergency repair (see table).

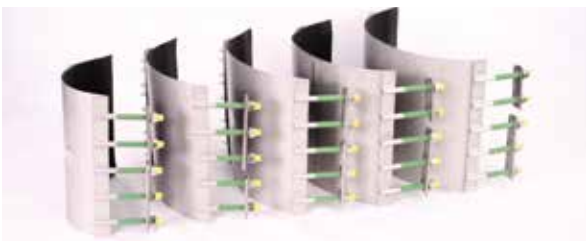

The highest quality

A lot of attention is paid to the production process of Multi/Clamp. The repair clamps are produced in an environment where only stainless steel is being processed. The risk of contact corrosion is excluded. In addition, all parts are welded by special welding robots and are passivated to maintain corrosion resistance. A constant high level of quality is guaranteed for a long term repair solution.

+ Stainless steel repair clamps for quick, safe and simple installation





For all kinds of repairs, large and small

Small repairs

For small(er) repairs we have two economically priced clamps available. The Multi/Clamp **Snap** and Multi/Clamp **Midi**. Both repair clamps are partially covered with a rubber gasket on the inside, making them ideal for repairing minor damages, caused by e.g. frost or corrosion. The Multi/Clamp Snap is made from stainless steel A2 (AISI 304) with cast iron lugs and is only suitable for aboveground use. The Multi/Clamp Midi is also made of stainless steel A2 (AISI 304) and can be used both under and aboveground. Both the Multi/Clamp Snap and the Multi/Clamp Midi are available in various lengths and suited for various operating pressures.

Large repairs

For large(r) repairs on heavily damaged pipe surfaces, whether under or aboveground, the Multi/Clamp **Single**, **Double** and **Triple** offer a solution. These three clamps differ in the number of clamp sections the repair clamp is made of; the more clamp sections, the bigger the range of the repair clamp. The Multi/Clamp Single, Double and Triple are made of stainless steel A2 (AISI 304) and on the inside they are completely covered with a rubber gasket for optimal sealing. The clamps are available in various lengths and suited for various operating pressures.

Tapping and branching off

For (hot) tapping a number of solutions are available. The Multi/Clamp **Saddle Studs**, Multi/Clamp **Thread** and Multi/Clamp **Flange**. The Thread is a clamp section fitted with a threaded outlet (up to 4") that fits on the Multi/Clamp Single, Double and Triple. The Multi/Clamp Saddle Studs is effectively the same, but is an economically priced alternative. The Multi/Clamp Flange is a clamp with a flanged outlet (up to DN400), mainly used for making branches. The flanged clamps are designed in such a way that the clamp sections can take sufficient tension to make the installation of hydrants and valves possible. Almost all clamps with a flange are fitted with a stainless steel reinforced ring in the branch gasket.

Multi/Clamp

Multi/Clamp

PF 1 54 325 010



Multi/Clamp Snap length 75 mm

Model:

- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- Lugs are made of ductile cast iron
- The rubber gasket is available in NBR (EPDM on request)
- The rubber gasket is clamped and partially covers the inside of the band
- The Multi/Clamp Snap is only suitable for above ground use
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- Suitable for use on steel, (ductile) cast iron and copper pipes
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
15 - 22	16.0	724 208 010	1.000
21 - 25	16.0	724 208 019	0.245
26 - 30	16.0	724 208 028	1.000
33 - 37	16.0	724 208 037	1.000
37 - 41	16.0	724 208 046	1.000
42 - 45	16.0	724 208 055	0.318
48 - 51	16.0	724 208 064	1.000
50 - 54	16.0	724 208 073	1.000
55 - 58	16.0	724 208 082	1.000
60 - 64	16.0	724 208 091	0.365
62 - 66	16.0	724 208 100	1.000
65 - 69	16.0	724 208 109	1.000
69 - 73	16.0	724 208 118	1.000
71 - 76	16.0	724 208 127	1.000
74 - 80	16.0	724 208 136	1.000
87 - 93	16.0	724 208 145	0.500
94 - 100	16.0	724 208 154	1.000
99 - 104	16.0	724 208 163	1.000
105 - 111	16.0	724 208 172	1.000
112 - 117	10.0	724 208 181	1.000
115 - 121	10.0	724 208 190	1.000
120 - 126	10.0	724 208 199	1.000
126 - 131	10.0	724 208 208	1.000
131 - 136	10.0	724 208 217	1.000
139 - 145	10.0	724 208 226	1.000
149 - 155	10.0	724 208 235	1.000
156 - 162	10.0	724 208 244	1.000
167 - 173	10.0	724 208 253	1.000
173 - 179	10.0	724 208 262	1.000
200 - 206	10.0	724 208 271	1.000
217 - 223	10.0	724 208 280	1.000
223 - 229	10.0	724 208 289	1.000
272 - 278	6.0	724 208 298	1.000
323 - 329	6.0	724 208 307	1.000



Multi/Clamp Snap length 150 mm

Model:

- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- Lugs are made of ductile cast iron
- The rubber gasket is available in NBR (EPDM on request)
- The rubber gasket is clamped and partially covers the inside of the band
- The Multi/Clamp Snap is only suitable for above ground use
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- Suitable for use on steel, (ductile) cast iron and copper pipes
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
15 - 22	16.0	724 208 011	1.000
21 - 25	16.0	724 208 020	1.000
26 - 30	16.0	724 208 029	1.000
33 - 37	16.0	724 208 038	1.000
37 - 41	16.0	724 208 047	0.613
42 - 45	16.0	724 208 056	1.000
48 - 51	16.0	724 208 065	1.000
50 - 54	16.0	724 208 074	0.681
55 - 58	16.0	724 208 083	1.000
60 - 64	16.0	724 208 092	1.000
62 - 66	16.0	724 208 101	1.000
65 - 69	16.0	724 208 110	1.000
69 - 73	16.0	724 208 119	1.000
71 - 76	16.0	724 208 128	1.000
74 - 80	16.0	724 208 137	1.000
87 - 93	16.0	724 208 146	1.000
94 - 100	16.0	724 208 155	1.000
99 - 104	16.0	724 208 164	1.000
105 - 111	16.0	724 208 173	1.000
112 - 117	10.0	724 208 182	1.000
115 - 121	10.0	724 208 191	1.000
120 - 126	10.0	724 208 200	1.000
126 - 131	10.0	724 208 209	1.000
131 - 136	10.0	724 208 218	1.000
139 - 145	10.0	724 208 227	1.000
149 - 155	10.0	724 208 236	1.000
156 - 162	10.0	724 208 245	1.000
167 - 173	10.0	724 208 254	1.000
173 - 179	10.0	724 208 263	1.000
200 - 206	10.0	724 208 272	1.000
217 - 223	10.0	724 208 281	1.000
223 - 229	10.0	724 208 290	1.000
272 - 278	6.0	724 208 299	1.000
323 - 329	6.0	724 208 308	1.000

Multi/Clamp Snap
length 225 mm
**Model:**

- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- Lugs are made of ductile cast iron
- The rubber gasket is available in NBR (EPDM on request)
- The rubber gasket is clamped and partially covers the inside of the band
- The Multi/Clamp Snap is only suitable for above ground use
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- Suitable for use on steel, (ductile) cast iron and copper pipes
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
15 - 22	16.0	724 208 012	1.000
21 - 25	16.0	724 208 021	1.000
26 - 30	16.0	724 208 030	1.000
33 - 37	16.0	724 208 039	1.000
37 - 41	16.0	724 208 048	1.000
42 - 45	16.0	724 208 057	1.000
48 - 51	16.0	724 208 066	1.000
50 - 54	16.0	724 208 075	1.000
55 - 58	16.0	724 208 084	1.000
60 - 64	16.0	724 208 093	1.000
62 - 66	16.0	724 208 102	1.000
65 - 69	16.0	724 208 111	1.000
69 - 73	16.0	724 208 120	1.000
71 - 76	16.0	724 208 129	1.000
74 - 80	16.0	724 208 138	1.000
87 - 93	16.0	724 208 147	1.000
94 - 100	16.0	724 208 156	1.000
99 - 104	16.0	724 208 165	1.000
105 - 111	16.0	724 208 174	1.000
112 - 117	10.0	724 208 183	1.000
115 - 121	10.0	724 208 192	1.000
120 - 126	10.0	724 208 201	1.000
126 - 131	10.0	724 208 210	1.000
131 - 136	10.0	724 208 219	1.000
139 - 145	10.0	724 208 228	1.000
149 - 155	10.0	724 208 237	1.000
156 - 162	10.0	724 208 246	1.000
167 - 173	10.0	724 208 255	1.000
173 - 179	10.0	724 208 264	1.000
200 - 206	10.0	724 208 273	1.000
217 - 223	10.0	724 208 282	1.000
223 - 229	10.0	724 208 291	1.000
272 - 278	6.0	724 208 300	1.000
323 - 329	6.0	724 208 309	1.000

Multi/Clamp Midi
length 100 mm
**Model:**

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Single band clamp with partial gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
19 - 23	16.0	724 209 010	1.000
25 - 29	16.0	724 209 019	1.000
32 - 36	16.0	724 209 028	1.000
38 - 42	16.0	724 209 037	1.000
44 - 51	16.0	724 209 046	1.000
48 - 55	16.0	724 209 055	1.000
54 - 58	16.0	724 209 064	1.000
60 - 64	16.0	724 209 073	1.000
63 - 70	16.0	724 209 082	1.000
67 - 74	16.0	724 209 091	1.000
70 - 77	16.0	724 209 100	1.000
73 - 80	16.0	724 209 109	1.000
75 - 83	16.0	724 209 118	1.000
82 - 90	16.0	724 209 127	1.000
87 - 97	16.0	724 209 136	1.000
95 - 104	16.0	724 209 145	1.000
98 - 108	16.0	724 209 154	1.000
102 - 112	16.0	724 209 163	1.000
108 - 118	16.0	724 209 172	1.000
113 - 123	16.0	724 209 181	1.000
118 - 128	16.0	724 209 190	1.000
120 - 131	16.0	724 209 199	1.000

Multi/Clamp Midi
length 150 mm
**Model:**

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Single band clamp with partial gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
54 - 58	16.0	724 209 065	1.000
60 - 64	16.0	724 209 074	1.000
63 - 70	16.0	724 209 083	1.000
67 - 74	16.0	724 209 092	1.000
70 - 77	16.0	724 209 101	1.000
73 - 80	16.0	724 209 110	1.000
75 - 83	16.0	724 209 119	1.000
82 - 90	16.0	724 209 128	1.000
87 - 97	16.0	724 209 137	1.000
95 - 104	16.0	724 209 146	1.000
98 - 108	16.0	724 209 155	1.000

table continued on the next page

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
102 - 112	16.0	724 209 164	1.000
108 - 118	16.0	724 209 173	1.000
113 - 123	16.0	724 209 182	1.000
118 - 128	16.0	724 209 191	1.000
120 - 131	16.0	724 209 200	1.000
125 - 135	16.0	724 209 209	1.000
133 - 144	16.0	724 209 218	1.000
139 - 150	16.0	724 209 227	1.000
145 - 155	16.0	724 209 236	1.000
151 - 161	16.0	724 209 245	1.000
159 - 170	16.0	724 209 254	1.000
165 - 175	16.0	724 209 263	1.000
168 - 180	16.0	724 209 272	1.000
176 - 186	10.0	724 209 281	1.000

Multi/Clamp Midi length 200 mm



Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Single band clamp with partial gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
95 - 104	16.0	724 209 147	1.000
98 - 108	16.0	724 209 156	1.000
102 - 112	16.0	724 209 165	1.000
108 - 118	16.0	724 209 174	1.000
113 - 123	16.0	724 209 183	1.000
118 - 128	16.0	724 209 192	1.000
120 - 131	16.0	724 209 201	1.000
125 - 135	16.0	724 209 210	1.000
133 - 144	16.0	724 209 219	1.000
139 - 150	16.0	724 209 228	1.000
145 - 155	16.0	724 209 237	1.000
151 - 161	16.0	724 209 246	1.000
159 - 170	16.0	724 209 255	1.000
165 - 175	16.0	724 209 264	1.000
168 - 180	16.0	724 209 273	1.000
176 - 186	10.0	724 209 282	1.000
180 - 191	10.0	724 209 291	1.000
193 - 203	10.0	724 209 300	1.000
200 - 210	10.0	724 209 309	1.000
209 - 220	10.0	724 209 318	1.000

Multi/Clamp Single
length 75 mm**Model:**

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Single band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
19 - 23	16.0	724 211 010	1.000
25 - 29	16.0	724 211 026	1.000
32 - 36	16.0	724 211 042	1.000
38 - 42	16.0	724 211 058	1.000

Multi/Clamp Single
length 150 mm**Model:**

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Single band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
19 - 23	16.0	724 211 011	1.000
25 - 29	16.0	724 211 027	1.000
32 - 36	16.0	724 211 043	1.000
38 - 42	16.0	724 211 059	1.000
44 - 51	16.0	724 211 075	1.000
48 - 55	16.0	724 211 091	1.000
52 - 59	16.0	724 211 107	1.000
57 - 64	16.0	724 211 123	1.000
60 - 67	16.0	724 211 139	1.000
63 - 70	16.0	724 211 155	1.000
67 - 74	16.0	724 211 171	1.000
70 - 77	16.0	724 211 187	1.000
73 - 80	16.0	724 211 203	1.000
75 - 83	16.0	724 211 219	1.000
82 - 90	16.0	724 211 235	1.000
87 - 97	16.0	724 211 251	1.000
95 - 104	16.0	724 211 267	1.000
98 - 108	16.0	724 211 283	1.000
102 - 112	16.0	724 211 299	1.000
108 - 118	16.0	724 211 315	1.000
113 - 123	16.0	724 211 331	1.000
118 - 128	16.0	724 211 347	1.000
120 - 131	16.0	724 211 363	1.000
125 - 135	16.0	724 211 379	1.000
133 - 144	16.0	724 211 395	1.000
139 - 150	16.0	724 211 411	1.000
145 - 155	16.0	724 211 427	1.000

table continued on the next page

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
151 - 161	16.0	724 211 443	1.000
159 - 170	16.0	724 211 459	1.000
165 - 175	16.0	724 211 475	1.000
168 - 180	16.0	724 211 491	1.000

Multi/Clamp Single length 200 mm



Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Single band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
44 - 51	16.0	724 211 076	1.000
48 - 55	16.0	724 211 092	1.000
52 - 59	16.0	724 211 108	1.000
57 - 64	16.0	724 211 124	1.000
60 - 67	16.0	724 211 140	1.000
63 - 70	16.0	724 211 156	1.000
67 - 74	16.0	724 211 172	1.000
70 - 77	16.0	724 211 188	1.000
73 - 80	16.0	724 211 204	1.000
75 - 83	16.0	724 211 220	1.000
82 - 90	16.0	724 211 236	1.000
87 - 97	16.0	724 211 252	1.000
95 - 104	16.0	724 211 268	1.000
98 - 108	16.0	724 211 284	1.000
102 - 112	16.0	724 211 300	1.000
108 - 118	16.0	724 211 316	1.000
113 - 123	16.0	724 211 332	1.000
118 - 128	16.0	724 211 348	1.000
120 - 131	16.0	724 211 364	1.000
125 - 135	16.0	724 211 380	1.000
133 - 144	16.0	724 211 396	1.000
139 - 150	16.0	724 211 412	1.000
145 - 155	16.0	724 211 428	1.000
151 - 161	16.0	724 211 444	1.000
159 - 170	16.0	724 211 460	1.000
165 - 175	16.0	724 211 476	1.000
168 - 180	16.0	724 211 492	1.000
176 - 186	10.0	724 211 508	1.000
180 - 191	10.0	724 211 524	1.000
193 - 203	10.0	724 211 540	1.000
200 - 210	10.0	724 211 556	1.000
209 - 220	10.0	724 211 572	1.000
215 - 226	10.0	724 211 588	1.000
219 - 230	10.0	724 211 604	1.000
222 - 233	10.0	724 211 620	1.000
228 - 240	10.0	724 211 636	1.000
243 - 253	10.0	724 211 652	1.000
252 - 262	10.0	724 211 668	1.000
261 - 271	10.0	724 211 684	1.000
271 - 281	10.0	724 211 700	1.000
280 - 290	10.0	724 211 716	1.000

table continued on the next page

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
294 - 304	10.0	724 211 732	1.000
300 - 310	10.0	724 211 748	1.000
310 - 320	10.0	724 211 764	1.000
315 - 326	10.0	724 211 780	1.000
320 - 330	10.0	724 211 796	1.000
324 - 334	10.0	724 211 812	1.000
335 - 346	10.0	724 211 828	1.000

Multi/Clamp Single length 250 mm



Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Single band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
60 - 67	16.0	724 211 141	1.000
63 - 70	16.0	724 211 157	1.000
67 - 74	16.0	724 211 173	1.000
70 - 77	16.0	724 211 189	1.000
73 - 80	16.0	724 211 205	1.000
75 - 83	16.0	724 211 221	1.000
82 - 90	16.0	724 211 237	1.000
87 - 97	16.0	724 211 253	1.000
95 - 104	16.0	724 211 269	1.000
98 - 108	16.0	724 211 285	1.000
102 - 112	16.0	724 211 301	1.000
108 - 118	16.0	724 211 317	1.000
113 - 123	16.0	724 211 333	1.000
118 - 128	16.0	724 211 349	1.000
120 - 131	16.0	724 211 365	1.000
125 - 135	16.0	724 211 381	1.000
133 - 144	16.0	724 211 397	1.000
139 - 150	16.0	724 211 413	1.000
145 - 155	16.0	724 211 429	1.000
151 - 161	16.0	724 211 445	1.000
159 - 170	16.0	724 211 461	1.000
165 - 175	16.0	724 211 477	1.000
168 - 180	16.0	724 211 493	1.000
176 - 186	10.0	724 211 509	1.000
180 - 191	10.0	724 211 525	1.000
193 - 203	10.0	724 211 541	1.000
200 - 210	10.0	724 211 557	1.000
209 - 220	10.0	724 211 573	1.000
215 - 226	10.0	724 211 589	1.000
219 - 230	10.0	724 211 605	1.000
222 - 233	10.0	724 211 621	1.000
228 - 240	10.0	724 211 637	1.000
243 - 253	10.0	724 211 653	1.000
252 - 262	10.0	724 211 669	1.000
261 - 271	10.0	724 211 685	1.000
271 - 281	10.0	724 211 701	1.000
280 - 290	10.0	724 211 717	1.000
294 - 304	10.0	724 211 733	1.000

table continued on the next page

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
300 - 310	10.0	724 211 749	1.000
310 - 320	10.0	724 211 765	1.000
315 - 326	10.0	724 211 781	1.000
320 - 330	10.0	724 211 797	1.000
324 - 334	10.0	724 211 813	1.000
335 - 346	10.0	724 211 829	1.000

Multi/Clamp Single length 300 mm



Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Single band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
60 - 67	16.0	724 211 142	1.000
63 - 70	16.0	724 211 158	1.000
67 - 74	16.0	724 211 174	1.000
70 - 77	16.0	724 211 190	1.000
73 - 80	16.0	724 211 206	1.000
75 - 83	16.0	724 211 222	1.000
82 - 90	16.0	724 211 238	1.000
87 - 97	16.0	724 211 254	1.000
95 - 104	16.0	724 211 270	1.000
98 - 108	16.0	724 211 286	1.000
102 - 112	16.0	724 211 302	1.000
108 - 118	16.0	724 211 318	1.000
113 - 123	16.0	724 211 334	1.000
118 - 128	16.0	724 211 350	1.000
120 - 131	16.0	724 211 366	1.000
125 - 135	16.0	724 211 382	1.000
133 - 144	16.0	724 211 398	1.000
139 - 150	16.0	724 211 414	1.000
145 - 155	16.0	724 211 430	1.000
151 - 161	16.0	724 211 446	1.000
159 - 170	16.0	724 211 462	1.000
165 - 175	16.0	724 211 478	1.000
168 - 180	16.0	724 211 494	1.000
176 - 186	10.0	724 211 510	1.000
180 - 191	10.0	724 211 526	1.000
193 - 203	10.0	724 211 542	1.000
200 - 210	10.0	724 211 558	1.000
209 - 220	10.0	724 211 574	1.000
215 - 226	10.0	724 211 590	1.000
219 - 230	10.0	724 211 606	1.000
222 - 233	10.0	724 211 622	1.000
228 - 240	10.0	724 211 638	1.000
243 - 253	10.0	724 211 654	1.000
252 - 262	10.0	724 211 670	1.000
261 - 271	10.0	724 211 686	1.000
271 - 281	10.0	724 211 702	1.000
280 - 290	10.0	724 211 718	1.000
294 - 304	10.0	724 211 734	1.000
300 - 310	10.0	724 211 750	1.000

table continued on the next page

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
310 - 320	10.0	724 211 766	1.000
315 - 326	10.0	724 211 782	1.000
320 - 330	10.0	724 211 798	1.000
324 - 334	10.0	724 211 814	1.000
335 - 346	10.0	724 211 830	1.000

Multi/Clamp Single length 400 mm



Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Single band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
63 - 70	16.0	724 211 159	1.000
67 - 74	16.0	724 211 175	1.000
70 - 77	16.0	724 211 191	1.000
73 - 80	16.0	724 211 207	1.000
75 - 83	16.0	724 211 223	1.000
82 - 90	16.0	724 211 239	1.000
87 - 97	16.0	724 211 255	1.000
95 - 104	16.0	724 211 271	1.000
98 - 108	16.0	724 211 287	1.000
102 - 112	16.0	724 211 303	1.000
108 - 118	16.0	724 211 319	1.000
113 - 123	16.0	724 211 335	1.000
118 - 128	16.0	724 211 351	1.000
120 - 131	16.0	724 211 367	1.000
125 - 135	16.0	724 211 383	1.000
133 - 144	16.0	724 211 399	1.000
139 - 150	16.0	724 211 415	1.000
145 - 155	16.0	724 211 431	1.000
151 - 161	16.0	724 211 447	1.000
159 - 170	16.0	724 211 463	1.000
165 - 175	16.0	724 211 479	1.000
168 - 180	16.0	724 211 495	1.000
176 - 186	10.0	724 211 511	1.000
180 - 191	10.0	724 211 527	1.000
193 - 203	10.0	724 211 543	1.000
200 - 210	10.0	724 211 559	1.000
209 - 220	10.0	724 211 575	1.000
215 - 226	10.0	724 211 591	1.000
219 - 230	10.0	724 211 607	1.000
222 - 233	10.0	724 211 623	1.000
228 - 240	10.0	724 211 639	1.000
243 - 253	10.0	724 211 655	1.000
252 - 262	10.0	724 211 671	1.000
261 - 271	10.0	724 211 687	1.000
271 - 281	10.0	724 211 703	1.000
280 - 290	10.0	724 211 719	1.000
294 - 304	10.0	724 211 735	1.000
300 - 310	10.0	724 211 751	1.000
310 - 320	10.0	724 211 767	1.000

table continued on the next page

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
315 - 326	10.0	724 211 783	1.000
320 - 330	10.0	724 211 799	1.000
324 - 334	10.0	724 211 815	1.000
335 - 346	10.0	724 211 831	1.000

Multi/Clamp Single length 500 mm



Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Single band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
108 - 118	16.0	724 211 320	1.000
113 - 123	16.0	724 211 336	1.000
118 - 128	16.0	724 211 352	1.000
120 - 131	16.0	724 211 368	1.000
125 - 135	16.0	724 211 384	1.000
133 - 144	16.0	724 211 400	1.000
139 - 150	16.0	724 211 416	1.000
145 - 155	16.0	724 211 432	1.000
151 - 161	16.0	724 211 448	1.000
159 - 170	16.0	724 211 464	1.000
165 - 175	16.0	724 211 480	1.000
168 - 180	16.0	724 211 496	1.000
176 - 186	10.0	724 211 512	1.000
180 - 191	10.0	724 211 528	1.000
193 - 203	10.0	724 211 544	1.000
200 - 210	10.0	724 211 560	1.000
209 - 220	10.0	724 211 576	1.000
215 - 226	10.0	724 211 592	1.000
219 - 230	10.0	724 211 608	1.000
222 - 233	10.0	724 211 624	1.000
228 - 240	10.0	724 211 640	1.000
243 - 253	10.0	724 211 656	1.000
252 - 262	10.0	724 211 672	1.000
261 - 271	10.0	724 211 688	1.000
271 - 281	10.0	724 211 704	1.000
280 - 290	10.0	724 211 720	1.000
294 - 304	10.0	724 211 736	1.000
300 - 310	10.0	724 211 752	1.000
310 - 320	10.0	724 211 768	1.000
315 - 326	10.0	724 211 784	1.000
320 - 330	10.0	724 211 800	1.000
324 - 334	10.0	724 211 816	1.000
335 - 346	10.0	724 211 832	1.000

**Multi/Clamp Single
length 600 mm**

Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Single band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
222 - 233	10.0	724 211 625	1.000
228 - 240	10.0	724 211 641	1.000
243 - 253	10.0	724 211 657	1.000
252 - 262	10.0	724 211 673	1.000
261 - 271	10.0	724 211 689	1.000
271 - 281	10.0	724 211 705	1.000
280 - 290	10.0	724 211 721	1.000
294 - 304	10.0	724 211 737	1.000
300 - 310	10.0	724 211 753	1.000
310 - 320	10.0	724 211 769	1.000
315 - 326	10.0	724 211 785	1.000
320 - 330	10.0	724 211 801	1.000
324 - 334	10.0	724 211 817	1.000
335 - 346	10.0	724 211 833	1.000

**Multi/Clamp Double
length 200 mm**

Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Double band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
88 - 110	16.0	724 212 058	2.770
108 - 128	16.0	724 212 074	3.400
112 - 134	16.0	724 212 090	2.920
120 - 140	16.0	724 212 106	3.400
133 - 155	16.0	724 212 122	3.800
138 - 160	16.0	724 212 138	3.630
158 - 180	16.0	724 212 154	4.400
168 - 190	16.0	724 212 170	4.400
190 - 210	10.0	724 212 186	4.070
195 - 217	10.0	724 212 202	4.700
210 - 230	10.0	724 212 218	4.900
216 - 238	10.0	724 212 234	4.900
225 - 246	10.0	724 212 250	5.100
238 - 260	10.0	724 212 266	5.100
251 - 271	10.0	724 212 282	5.300

table continued on the next page

PF 1 54 325 009

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
260 - 280	10.0	724 212 298	5.300
269 - 289	10.0	724 212 314	5.300
273 - 293	10.0	724 212 330	5.300
295 - 315	10.0	724 212 346	5.300

PF 1 54 325 009

Multi/Clamp Double length 250 mm

Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Double band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
88 - 110	16.0	724 212 059	4.500
108 - 128	16.0	724 212 075	4.700
112 - 134	16.0	724 212 091	4.700
120 - 140	16.0	724 212 107	4.700
133 - 155	16.0	724 212 123	5.200
138 - 160	16.0	724 212 139	5.200
158 - 180	16.0	724 212 155	5.120
168 - 190	16.0	724 212 171	6.000
190 - 210	10.0	724 212 187	6.400
195 - 217	10.0	724 212 203	6.400
210 - 230	10.0	724 212 219	6.600
216 - 238	10.0	724 212 235	6.600
225 - 246	10.0	724 212 251	6.900
238 - 260	10.0	724 212 267	6.900
251 - 271	10.0	724 212 283	7.200
260 - 280	10.0	724 212 299	7.200
269 - 289	10.0	724 212 315	7.200
273 - 293	10.0	724 212 331	7.200
295 - 315	10.0	724 212 347	7.200
314 - 335	10.0	724 212 363	7.400
322 - 344	10.0	724 212 379	7.400
334 - 354	10.0	724 212 395	7.400
340 - 360	10.0	724 212 411	7.400

**Multi/Clamp Double
length 300 mm**

Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Double band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
88 - 110	16.0	724 212 060	4.180
108 - 128	16.0	724 212 076	4.440
112 - 134	16.0	724 212 092	5.300
120 - 140	16.0	724 212 108	5.300
133 - 155	16.0	724 212 124	5.800
138 - 160	16.0	724 212 140	5.500
158 - 180	16.0	724 212 156	5.790
168 - 190	16.0	724 212 172	5.880
190 - 210	10.0	724 212 188	6.190
195 - 217	10.0	724 212 204	7.100
210 - 230	10.0	724 212 220	7.500
216 - 238	10.0	724 212 236	7.500
225 - 246	10.0	724 212 252	7.800
238 - 260	10.0	724 212 268	7.800
251 - 271	10.0	724 212 284	8.900
260 - 280	10.0	724 212 300	8.900
269 - 289	10.0	724 212 316	8.900
273 - 293	10.0	724 212 332	8.900
295 - 315	10.0	724 212 348	8.900
314 - 335	10.0	724 212 364	9.500
322 - 344	10.0	724 212 380	9.500
334 - 354	10.0	724 212 396	9.500
340 - 360	10.0	724 212 412	9.500
348 - 368	10.0	724 212 428	10.200
365 - 385	10.0	724 212 444	10.200
376 - 396	10.0	724 212 460	10.200
382 - 402	10.0	724 212 476	10.200
390 - 410	10.0	724 212 492	10.200
404 - 424	10.0	724 212 508	11.000
420 - 440	10.0	724 212 524	11.000

**Multi/Clamp Double
length 400 mm**

Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Double band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
88 - 110	16.0	724 212 061	6.600
108 - 128	16.0	724 212 077	6.900
112 - 134	16.0	724 212 093	6.900

table continued on the next page

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
120 - 140	16.0	724 212 109	6.900
133 - 155	16.0	724 212 125	7.600
138 - 160	16.0	724 212 141	7.600
158 - 180	16.0	724 212 157	8.800
168 - 190	16.0	724 212 173	8.800
190 - 210	10.0	724 212 189	9.400
195 - 217	10.0	724 212 205	9.400
210 - 230	10.0	724 212 221	9.800
216 - 238	10.0	724 212 237	9.800
225 - 246	10.0	724 212 253	10.200
238 - 260	10.0	724 212 269	10.200
251 - 271	10.0	724 212 285	11.500
260 - 280	10.0	724 212 301	11.500
269 - 289	10.0	724 212 317	11.500
273 - 293	10.0	724 212 333	11.500
295 - 315	10.0	724 212 349	11.500
314 - 335	10.0	724 212 365	12.300
322 - 344	10.0	724 212 381	12.300
334 - 354	10.0	724 212 397	12.300
340 - 360	10.0	724 212 413	12.300
348 - 368	10.0	724 212 429	13.200
365 - 385	10.0	724 212 445	13.200
376 - 396	10.0	724 212 461	13.200
382 - 402	10.0	724 212 477	13.200
390 - 410	10.0	724 212 493	13.200
404 - 424	10.0	724 212 509	14.200
420 - 440	10.0	724 212 525	14.200
440 - 460	10.0	724 212 541	14.200
457 - 477	10.0	724 212 557	14.800
468 - 488	10.0	724 212 573	14.800
488 - 508	10.0	724 212 589	14.800
500 - 520	10.0	724 212 605	15.900
520 - 540	6.0	724 212 621	15.900
527 - 547	6.0	724 212 637	15.900
545 - 565	6.0	724 212 653	15.900
555 - 570	6.0	724 212 669	15.900
568 - 588	6.0	724 212 685	15.900
586 - 606	6.0	724 212 701	15.900
600 - 620	6.0	724 212 717	17.700
625 - 645	6.0	724 212 733	17.700
650 - 670	6.0	724 212 749	17.700

Multi/Clamp Double length 500 mm

Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Double band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
88 - 110	16.0	724 212 062	8.400
108 - 128	16.0	724 212 078	8.800
112 - 134	16.0	724 212 094	8.800
120 - 140	16.0	724 212 110	8.800

table continued on the next page

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
133 - 155	16.0	724 212 126	9.600
138 - 160	16.0	724 212 142	9.600
158 - 180	16.0	724 212 158	11.200
168 - 190	16.0	724 212 174	11.200
190 - 210	10.0	724 212 190	12.100
195 - 217	10.0	724 212 206	12.100
210 - 230	10.0	724 212 222	12.500
216 - 238	10.0	724 212 238	12.500
225 - 246	10.0	724 212 254	13.000
238 - 260	10.0	724 212 270	13.000
251 - 271	10.0	724 212 286	15.200
260 - 280	10.0	724 212 302	15.200
269 - 289	10.0	724 212 318	15.200
273 - 293	10.0	724 212 334	15.200
295 - 315	10.0	724 212 350	15.200
314 - 335	10.0	724 212 366	16.100
322 - 344	10.0	724 212 382	16.100
334 - 354	10.0	724 212 398	16.100
340 - 360	10.0	724 212 414	16.100
348 - 368	10.0	724 212 430	17.200
365 - 385	10.0	724 212 446	17.200
376 - 396	10.0	724 212 462	17.200
382 - 402	10.0	724 212 478	17.200
390 - 410	10.0	724 212 494	17.200
404 - 424	10.0	724 212 510	18.700
420 - 440	10.0	724 212 526	18.700
440 - 460	10.0	724 212 542	18.700
457 - 477	10.0	724 212 558	19.200
468 - 488	10.0	724 212 574	19.200
488 - 508	10.0	724 212 590	19.200
500 - 520	10.0	724 212 606	20.700
520 - 540	6.0	724 212 622	20.700
527 - 547	6.0	724 212 638	20.700
545 - 565	6.0	724 212 654	20.700
555 - 570	6.0	724 212 670	20.700
568 - 588	6.0	724 212 686	20.700
586 - 606	6.0	724 212 702	20.700
600 - 620	6.0	724 212 718	22.900
625 - 645	6.0	724 212 734	22.900
650 - 670	6.0	724 212 750	22.900



Multi/Clamp Double length 600 mm

Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Double band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
314 - 335	10.0	724 212 367	19.000
322 - 344	10.0	724 212 383	19.000
334 - 354	10.0	724 212 399	19.000
340 - 360	10.0	724 212 415	19.000
348 - 368	10.0	724 212 431	20.500

table continued on the next page

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
365 - 385	10.0	724 212 447	20.500
376 - 396	10.0	724 212 463	20.500
382 - 402	10.0	724 212 479	20.500
390 - 410	10.0	724 212 495	20.500
404 - 424	10.0	724 212 511	21.800
420 - 440	10.0	724 212 527	21.800
440 - 460	10.0	724 212 543	21.800
457 - 477	10.0	724 212 559	23.000
468 - 488	10.0	724 212 575	23.000
488 - 508	10.0	724 212 591	23.000
500 - 520	10.0	724 212 607	24.500
520 - 540	6.0	724 212 623	24.500
527 - 547	6.0	724 212 639	24.500
545 - 565	6.0	724 212 655	24.500
555 - 570	6.0	724 212 671	24.500
568 - 588	6.0	724 212 687	24.500
586 - 606	6.0	724 212 703	24.500
600 - 620	6.0	724 212 719	27.200
625 - 645	6.0	724 212 735	27.200
650 - 670	6.0	724 212 751	27.200
705 - 725	4.0	724 212 767	19.700
730 - 750	4.0	724 212 783	29.200
755 - 775	4.0	724 212 799	29.200
805 - 825	3.0	724 212 815	30.500
835 - 855	3.0	724 212 831	31.500



Multi/Clamp Double length 750 mm

Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Double band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
420 - 440	10.0	724 212 528	26.300
440 - 460	10.0	724 212 544	26.300
457 - 477	10.0	724 212 560	28.500
468 - 488	10.0	724 212 576	28.500
488 - 508	10.0	724 212 592	28.500
500 - 520	10.0	724 212 608	30.900
520 - 540	6.0	724 212 624	30.900
527 - 547	6.0	724 212 640	30.900
545 - 565	6.0	724 212 656	30.900
555 - 570	6.0	724 212 672	30.900
568 - 588	6.0	724 212 688	30.900
586 - 606	6.0	724 212 704	30.900
600 - 620	6.0	724 212 720	34.500
625 - 645	6.0	724 212 736	34.500
650 - 670	6.0	724 212 752	34.500
705 - 725	4.0	724 212 768	24.900

table continued on the next page

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
730 - 750	4.0	724 212 784	36.500
755 - 775	4.0	724 212 800	36.500
805 - 825	3.0	724 212 816	38.000
835 - 855	3.0	724 212 832	39.000



Multi/Clamp Triple length 300 mm

Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Triple band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
267 - 297	10.0	724 213 060	1.000
300 - 330	10.0	724 213 076	1.000
323 - 353	10.0	724 213 092	1.000
352 - 382	10.0	724 213 108	1.000
378 - 408	10.0	724 213 124	1.000
402 - 432	10.0	724 213 140	1.000
429 - 459	10.0	724 213 156	1.000
456 - 486	10.0	724 213 172	1.000
490 - 520	10.0	724 213 188	1.000
520 - 550	10.0	724 213 204	1.000



Multi/Clamp Triple length 400 mm

Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Triple band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
267 - 297	10.0	724 213 061	1.000
300 - 330	10.0	724 213 077	1.000
323 - 353	10.0	724 213 093	1.000
352 - 382	10.0	724 213 109	1.000
378 - 408	10.0	724 213 125	1.000
402 - 432	10.0	724 213 141	1.000
429 - 459	10.0	724 213 157	1.000
456 - 486	10.0	724 213 173	1.000
490 - 520	10.0	724 213 189	1.000

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
520 - 550	10.0	724 213 205	1.000
532 - 562	6.0	724 213 221	1.000
545 - 575	6.0	724 213 237	1.000
570 - 600	6.0	724 213 253	1.000

Multi/Clamp Triple length 500 mm



Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Triple band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
352 - 382	10.0	724 213 110	1.000
378 - 408	10.0	724 213 126	1.000
402 - 432	10.0	724 213 142	1.000
429 - 459	10.0	724 213 158	1.000
456 - 486	10.0	724 213 174	1.000
490 - 520	10.0	724 213 190	1.000
520 - 550	10.0	724 213 206	29.000
532 - 562	6.0	724 213 222	1.000
545 - 575	6.0	724 213 238	1.000
570 - 600	6.0	724 213 254	1.000
586 - 616	6.0	724 213 270	1.000
609 - 639	6.0	724 213 286	1.000
615 - 645	6.0	724 213 302	1.000
633 - 663	4.0	724 213 318	1.000
640 - 670	4.0	724 213 334	1.000
654 - 684	4.0	724 213 350	1.000

Multi/Clamp Triple length 600 mm



Model:


- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Triple band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
456 - 486	10.0	724 213 175	1.000
490 - 520	10.0	724 213 191	1.000
520 - 550	10.0	724 213 207	1.000
532 - 562	6.0	724 213 223	1.000
545 - 575	6.0	724 213 239	1.000
570 - 600	6.0	724 213 255	1.000
586 - 616	6.0	724 213 271	1.000

table continued on the next page

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
609 - 639	6.0	724 213 287	1.000
615 - 645	6.0	724 213 303	1.000
633 - 663	4.0	724 213 319	1.000
640 - 670	4.0	724 213 335	1.000
654 - 684	4.0	724 213 351	1.000
670 - 700	4.0	724 213 367	1.000
702 - 732	4.0	724 213 383	1.000
711 - 741	4.0	724 213 399	1.000
729 - 759	4.0	724 213 415	1.000
747 - 777	4.0	724 213 431	1.000
780 - 815	4.0	724 213 447	1.000
800 - 830	4.0	724 213 463	1.000
813 - 843	3.0	724 213 479	1.000
830 - 860	3.0	724 213 495	1.000
852 - 882	2.0	724 213 511	1.000
864 - 894	2.0	724 213 527	1.000
900 - 930	2.0	724 213 543	1.000
925 - 955	2.0	724 213 559	1.000
945 - 975	2.0	724 213 575	1.000
970 - 1000	2.0	724 213 591	1.000

Multi/Clamp Triple length 750 mm



Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Triple band clamp with full circle gasket
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	PN Water (bar)	NBR Code	Weight (kg)
545 - 575	6.0	724 213 240	1.000
570 - 600	6.0	724 213 256	1.000
586 - 616	6.0	724 213 272	1.000
609 - 639	6.0	724 213 288	1.000
615 - 645	6.0	724 213 304	1.000
633 - 663	4.0	724 213 320	1.000
640 - 670	4.0	724 213 336	1.000
654 - 684	4.0	724 213 352	1.000
670 - 700	4.0	724 213 368	1.000
702 - 732	4.0	724 213 384	48.000
711 - 741	4.0	724 213 400	1.000
729 - 759	4.0	724 213 416	1.000
747 - 777	4.0	724 213 432	1.000
780 - 815	4.0	724 213 448	1.000
800 - 830	4.0	724 213 464	1.000
813 - 843	3.0	724 213 480	1.000
830 - 860	3.0	724 213 496	1.000
852 - 882	2.0	724 213 512	1.000
864 - 894	2.0	724 213 528	1.000
900 - 930	2.0	724 213 544	1.000
925 - 955	2.0	724 213 560	1.000
945 - 975	2.0	724 213 576	1.000
970 - 1000	2.0	724 213 592	1.000

Multi/Clamp Thread (surcharge)



Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- The Multi/Clamp single, double and triple can be equipped with a threaded outlet
- To obtain the total product price please take the surcharge for the threaded outlet and the price of the repair clamp
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- Female threaded outlet (other threads or combinations on request)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Size (inch)	min. pipe OD	Length	Code
½	from 48 mm	min. length 150 mm	thread1/2
¾	from 48 mm	min. length 150 mm	thread3/4
1	from 54 mm	min. length 150 mm	thread1
1 ¼	from 76 mm	min. length 150 mm	thread1.1/4
1 ½	from 82 mm	min. length 200 mm	thread1.1/2
2	from 87 mm	min. length 200 mm	thread2
2 ½	from 110 mm	min. length 200 mm	thread2.1/2
3	from 130 mm	min. length 300 mm	thread3
4	from 155 mm	min. length 400 mm	thread4

PF 1 54 327 011



Multi/Clamp Saddle Studs threaded outlet 1/2"

Model:

- Saddle with threaded outlet
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Outlet dimension up to 4" available on request
- Lower shell half is without gasket (available on request)
- Other sizes available on request
- Not suitable for the use on plastic pipes
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.

Range (mm)	PN Water (bar)	NBR Code
68 - 78	16.0	724 201 061
88 - 110	16.0	724 201 073
108 - 134	16.0	724 201 097
133 - 155	16.0	724 201 133
159 - 181	16.0	724 201 169
168 - 190	16.0	724 201 193
190 - 212	16.0	724 201 205
216 - 238	16.0	724 201 217
238 - 260	16.0	724 201 241
267 - 289	16.0	724 201 253

PF 1 54 327 011



Multi/Clamp Saddle Studs threaded outlet 3/4"

Model:

- Saddle with threaded outlet
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Outlet dimension up to 4" available on request
- Lower shell half is without gasket (available on request)
- Other sizes available on request
- Not suitable for the use on plastic pipes
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.

Range (mm)	PN Water (bar)	NBR Code
68 - 78	16.0	724 201 062
88 - 110	16.0	724 201 074
108 - 134	16.0	724 201 098
133 - 155	16.0	724 201 134
159 - 181	16.0	724 201 170
168 - 190	16.0	724 201 194
190 - 212	16.0	724 201 206
216 - 238	16.0	724 201 218
238 - 260	16.0	724 201 242
267 - 289	16.0	724 201 254

PF 1 54 327 011



Multi/Clamp Saddle Studs threaded outlet 1"

Model:

- Saddle with threaded outlet
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Outlet dimension up to 4" available on request
- Lower shell half is without gasket (available on request)
- Other sizes available on request
- Not suitable for the use on plastic pipes
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.

Range (mm)	PN Water (bar)	NBR Code
68 - 78	16.0	724 201 063
88 - 110	16.0	724 201 075
108 - 134	16.0	724 201 099
133 - 155	16.0	724 201 135
159 - 181	16.0	724 201 171
168 - 190	16.0	724 201 195
190 - 212	16.0	724 201 207
216 - 238	16.0	724 201 219
238 - 260	16.0	724 201 243
267 - 289	16.0	724 201 255

PF 1 54 327 011



Multi/Clamp Saddle Studs threaded outlet 1 1/4"

Model:

- Saddle with threaded outlet
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Outlet dimension up to 4" available on request
- Lower shell half is without gasket (available on request)
- Other sizes available on request
- Not suitable for the use on plastic pipes
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.

Range (mm)	PN Water (bar)	NBR Code
88 - 110	16.0	724 201 076
108 - 134	16.0	724 201 100
133 - 155	16.0	724 201 136
159 - 181	16.0	724 201 172
168 - 190	16.0	724 201 196
190 - 212	16.0	724 201 208
216 - 238	16.0	724 201 220
238 - 260	16.0	724 201 244
267 - 289	16.0	724 201 256

PF 1 54 327 011



Multi/Clamp Saddle Studs threaded outlet 1 1/2"

Model:

- Saddle with threaded outlet
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Outlet dimension up to 4" available on request
- Lower shell half is without gasket (available on request)
- Other sizes available on request
- Not suitable for the use on plastic pipes
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.

Range (mm)	PN Water (bar)	NBR Code
108 - 134	16.0	724 201 101
133 - 155	16.0	724 201 137
159 - 181	16.0	724 201 173
168 - 190	16.0	724 201 197
190 - 212	16.0	724 201 209
216 - 238	16.0	724 201 221
238 - 260	16.0	724 201 245
267 - 289	16.0	724 201 257



Multi/Clamp Saddle Studs threaded outlet 2"

Model:

- Saddle with threaded outlet
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Outlet dimension up to 4" available on request
- Lower shell half is without gasket (available on request)
- Other sizes available on request
- Not suitable for the use on plastic pipes
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.

Range (mm)	PN Water (bar)	NBR Code
108 - 134	16.0	724 201 102
133 - 155	16.0	724 201 138
159 - 181	16.0	724 201 174
168 - 190	16.0	724 201 198
190 - 212	16.0	724 201 210
216 - 238	16.0	724 201 222
238 - 260	16.0	724 201 246
267 - 289	16.0	724 201 258



Multi/Clamp Flange (tapping sleeve) length 300 mm

Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Double band saddle with flanged outlet
- Full circle construction for optimal pipe support
- To obtain the total product price, please take the price of the tapping sleeve and add the price for the flange outlet
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	DN (mm)	PN Water (bar)	NBR Code
95 - 104		16.0	95-104L300N
98 - 108		16.0	98-108L300N
108 - 128		16.0	108-128L300N
118 - 138		16.0	118-138L300N
133 - 153		16.0	133-153L300N
143 - 163		16.0	143-163L300N
160 - 180		16.0	160-180L300N
180 - 200		16.0	180-200L300N
190 - 210		16.0	190-210L300N
210 - 230		16.0	210-230L300N
230 - 250		16.0	230-250L300N
240 - 260		16.0	240-260L300N
250 - 270		16.0	250-270L300N
270 - 290		16.0	270-290L300N
290 - 310		16.0	290-310L300N
315 - 335		16.0	315-335L300N
335 - 355		16.0	335-355L300N
-	350	16.0	DN350L300N



Multi/Clamp Flange (tapping sleeve) length 400 mm

Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Double band saddle with flanged outlet
- Full circle construction for optimal pipe support
- To obtain the total product price, please take the price of the tapping sleeve and add the price for the flange outlet
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	DN (mm)	PN Water (bar)	NBR Code
95 - 104		16.0	95-104L400N
98 - 108		16.0	98-108L400N
108 - 128		16.0	108-128L400N
118 - 138		16.0	118-138L400N
133 - 153		16.0	133-153L400N
143 - 163		16.0	143-163L400N
160 - 180		16.0	160-180L400N
180 - 200		16.0	180-200L400N
190 - 210		16.0	190-210L400N
210 - 230		16.0	210-230L400N
230 - 250		16.0	230-250L400N
240 - 260		16.0	240-260L400N
250 - 270		16.0	250-270L400N
270 - 290		16.0	270-290L400N
290 - 310		16.0	290-310L400N
315 - 335		16.0	315-335L400N
335 - 355		16.0	335-355L400N
-	350	16.0	DN350L400N
-	400	16.0	DN400L400N
-	450	16.0	DN450L400N
-	500	16.0	DN500L400N
-	600	10.0	DN600L400N
-	700		DN700L400N



Multi/Clamp Flange (tapping sleeve) length 500 mm

Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Double band saddle with flanged outlet
- Full circle construction for optimal pipe support
- To obtain the total product price, please take the price of the tapping sleeve and add the price for the flange outlet
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	DN (mm)	PN Water (bar)	NBR Code
95 - 104		16.0	95-104L500N
98 - 108		16.0	98-108L500N
108 - 128		16.0	108-128L500N
118 - 138		16.0	118-138L500N

table continued on the next page

Range (mm)	DN (mm)	PN Water (bar)	NBR Code
133 - 153		16.0	133-153L500N
143 - 163		16.0	143-163L500N
160 - 180		16.0	160-180L500N
180 - 200		16.0	180-200L500N
190 - 210		16.0	190-210L500N
210 - 230		16.0	210-230L500N
230 - 250		16.0	230-250L500N
240 - 260		16.0	240-260L500N
250 - 270		16.0	250-270L500N
270 - 290		16.0	270-290L500N
290 - 310		16.0	290-310L500N
315 - 335		16.0	315-335L500N
335 - 355		16.0	335-355L500N
-	350	16.0	DN350L500N
-	400	16.0	DN400L500N
-	450	16.0	DN450L500N
-	500	16.0	DN500L500N
-	600	10.0	DN600L500N
-	700		DN700L500N
-	750		DN750L500N
-	800		DN800L500N



Multi/Clamp Flange (tapping sleeve) length 600 mm

Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Double band saddle with flanged outlet
- Full circle construction for optimal pipe support
- To obtain the total product price, please take the price of the tapping sleeve and add the price for the flange outlet
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

Range (mm)	DN (mm)	PN Water (bar)	NBR Code
315 - 335		16.0	315-335L600N
335 - 355		16.0	335-355L600N
-	350	16.0	DN350L600N
-	400	16.0	DN400L600N
-	450	16.0	DN450L600N
-	500	16.0	DN500L600N
-	600	10.0	DN600L600N
-	700		DN700L600N
-	750		DN750L600N
-	800		DN800L600N



Multi/Clamp Flange (tapping sleeve) length 750 mm

Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- Double band saddle with flanged outlet
- Full circle construction for optimal pipe support
- To obtain the total product price, please take the price of the tapping sleeve and add the price for the flange outlet
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.
- To choose the correct length of Multi/Clamp check our technical information

DN (mm)	PN Water (bar)	NBR Code
400	16.0	DN400L750N
450	16.0	DN450L750N
500	16.0	DN500L750N
600	10.0	DN600L750N
700		DN700L750N
750		DN750L750N
800		DN800L750N



Multi/Clamp Flange (flange outlet)

Model:

- To obtain the total product price please add the price of the tapping sleeve
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- To choose the correct length of Multi/Clamp check our technical information

DN (mm)	Drilling pat- tern	Toivottu rungon pituus	Total height of the branch and flange (mm)	Code
50	PN 10/16	300 mm	80	flangeDN50
65	PN 10/16	300 mm	80	flangeDN65
80	PN 10/16	300 mm (400 mm if pipe OD > 300)	100	flangeDN80
100	PN 10/16	400 mm	100	flangeDN100
125	PN 10/16	400 mm	120	flangeDN125
150	PN 10/16	400 mm	130	flangeDN150
200	PN 10	500 mm	140	flangeDN200
250	PN 10	600 mm	165	flangeDN250
300	PN 10	750 mm	165	flangeDN300

Multi/Clamp Combi Box
length 400 mm

Model:

- Suitable for all kinds of pipe material. For use on plastic pipes please consult Georg Fischer Waga N.V.
- A combination of either two or more shell sections enables you to repair pipes from OD 91 mm up to OD 1146 mm
- All metal parts are stainless steel, quality AISI 304 (on request AISI 316)
- The rubber gasket is available in NBR (EPDM on request)
- Water and gas: NBR according to EN 682 (-10°C up to +70°C); potable water: EPDM according to EN 681-1 (-10°C up to +55°C)
- For working pressures in GAS please consult Georg Fischer Waga N.V.

Description	NBR Code	Weight (kg)	EPDM Code
Repair set complete (all shell sections + wooden box)	724 213 730	35.000	724 233 730
Shell section A	724 213 746	5.000	724 233 746
Shell section B	724 213 762	5.234	724 233 762
Shell section C	724 213 778	5.572	724 233 778
Shell section D	724 213 794	6.150	724 233 794
Shell section E	724 213 810	6.704	724 233 810
Wooden box separate	724 213 826	6.000	

Range [mm]	description	PN water [bar]
91 - 98	A	16
111 - 121	B	16
131 - 141	C	16
162 - 172	D	16
193 - 203	E	16
	<u>Shell sections to combine with 1 Multi/Clamp Combi Box:</u>	
213 - 233	A B	16
233 - 253	A C	16
253 - 273	B C	10
264 - 284	A D	10
284 - 304	B D	10
295 - 315	A E	10
304 - 324	C D	10
314 - 334	B E	10
335 - 355	C E	10
354 - 384	A B C	10
386 - 416	A B D	10
406 - 436	A C D	10
416 - 446	A B E	10
426 - 456	B C D	10
436 - 466	A C E	10
456 - 486	B C E	10
467 - 497	A D E	10
487 - 517	B D E	10
508 - 538	C D E	10
527 - 567	A B C D	6
558 - 598	A B C E	6
589 - 629	A B D E	6
609 - 649	A C D E	4
629 - 669	B C D E	4
730 - 780	A B C D E	2
	<u>Shell sections to combine with 2 Multi/Clamp Combi Boxes:</u>	
661 - 701	B D D E	2
720 - 770	E E B A A	2
761 - 811	E E C B A	2
833 - 883	E E D C B	2
853 - 903	E E D C C	2
934 - 994	E E D C B A	2
965 - 1025	E E D D B A	1
1026 - 1086	E E D D C C	1
1076 - 1146	E E D C C B A	1