


PVC Branch 87° SN4 (KGEA)

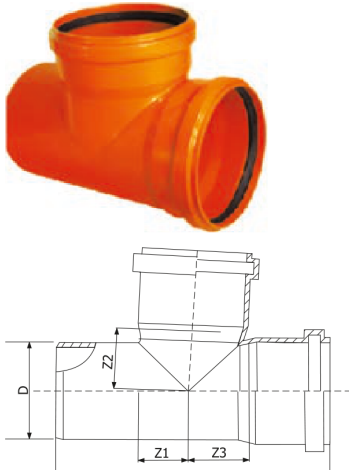

Material	PVC-U
Ring stiffness	SN4 (also used with SN2 pipes)
Colour	Orange (RAL 8023)
Application	Non-pressure underground sewage and rainwater drainage outside buildings
Jointing	Socket with EPDM sealing ring
Temperature	Max. 60 °C for D 110–200; 40 °C for D 250–500 (60 °C short-term)

Code	D/D1 (mm)	α (°)	Z1 (mm)	Z2 (mm)	Z3 (mm)	L (mm)
FVE0253	110/110	87	59	62	62	238
FVE0136	125/110	87	58	69	63	250
FVE0160	125/125	87	65	70	70	265
FVE0060	160/110	87	58	86	64	278
FVE0178	160/125	87	66	87	71	294
FVE0044	160/160	87	83	89	89	328
FVE0022	200/110	87	63	108	69	320
FVE0175	200/125	87	71	108	77	337
FVE0089	200/160	87	88	110	93	369
FVE0024	200/200	87	107	113	113	409
FVE0179	250/110	87	90	132	100	433
FVE0226	250/125	87	99	132	100	433
FVE0026	250/160	87	99	134	100	433
FVE0093	250/200	87	99	136	143	518
FVE0071	250/250	87	141	143	143	518
FVE0101	315/110	87	78	162	104	438
FVE0232	315/125	87	78	162	104	438
FVE0170	315/160	87	78	164	104	438
FVE0083	315/200	87	178	170	178	612
FVE0193	315/250	87	178	174	178	612
FVE0067	315/315	87	178	178	178	612
FVE0296	400/110	87	153	240	183	661
FVI0051	400/160	87	120	135	205	700
FVI0036	400/200	87	145	145	240	775
FVE0334	400/250	87	186	270	227	738
FVI0222	400/315	87	186	260	227	738
FVE0244	400/400	87	250	230	270	910
FVE0208	500/160	87	163	300	205	848
FVI0053	500/200	87	163	300	205	748
FVE0316	500/250	87	-	-	-	660
FVI0221	500/315	87	-	-	-	725
FVE0317	500/400	87	-	-	-	810
FVI0211	500/500	87	265	345	355	1160

Dimensions as published by the manufacturer; symbols refer to the drawing above.

"-" = not published.