


PROGEF Standard Check valve type 561
Without spring
With butt fusion spigots SDR17,6 metric

Model:

- Material: PP-H
- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

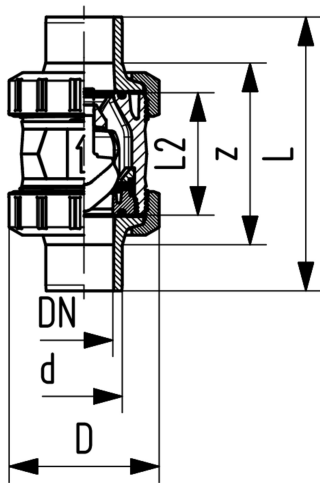

d	DN	Size	SDR	PN	kv-value	EPDM	Weight	FKM	Weight
(mm)	(mm)	(inch)		(bar)	($\Delta p=1$ bar)	Code	(kg)	Code	(kg)
					(l/min)				
50	40	1 ½	17.6	10	1080	167 561 066	0.510	167 561 076	0.510
63	50	2	17.6	10	1670	167 561 067	0.940	167 561 077	0.940
75	65	2 ½	17.6	10	2950	167 561 068	2.340	167 561 078	2.360
90	80	3	17.6	10	3600	167 561 069	3.650	167 561 079	3.670
110	100	4	17.6	10	4150	167 561 070	5.790	167 561 080	5.820

d	D	L	L2	e	closest
(mm)	(mm)	(mm)	(mm)	(mm)	inch
					(inch)
50	97	191	89	2.9	1 ½
63	124	220	101	3.6	2
75	166	266	136	4.7	2 ½
90	200	264	141	5.5	3
110	238	301	164	6.8	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>