


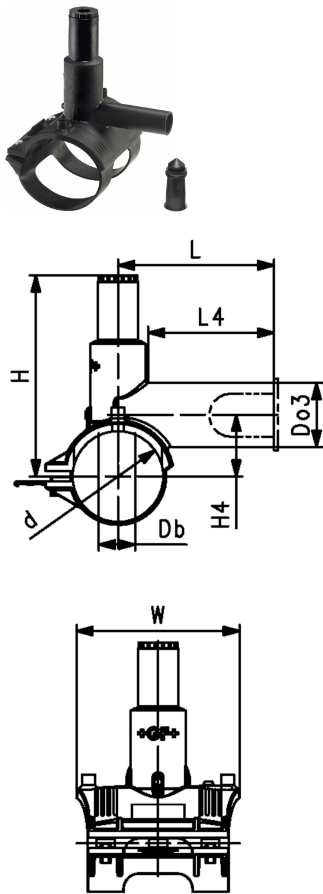

ELGEF Plus Tapping saddle PE100
d63-160mm / SDR11 / Monobloc version / With gas-stop type 1-5 bar

- 5 bar Gas (for pressure 1 bar -5 bar)
- With integrated cutter to tap live mains under pressure
- Complete with moulded-on lower part
- **Without overflow orifice**
- Set comes with Gas-Stop pre-assembled
- Installation instructions of Gas-Stop manufacturer are to be observed
- 4 mm pin connectors
- Limited path fusion indicators
- Long fusion outlet
- O-ring-sealed screw cap

d	Do3	DN	Code	Weight
(mm)	(mm)	(mm)		(kg)
63	20	50	193 130 432	0.368
63	32	50	193 130 434	0.412
90	20	80	193 130 452	0.524
90	32	80	193 130 454	0.520
110	20	100	193 130 462	0.552
110	32	100	193 130 464	0.620
125	20	100	193 130 472	0.664
125	32	100	193 130 474	0.628
160	20	150	193 130 492	0.672
160	32	150	193 130 494	0.786

L	L4	Db	W	H	H4	max Volume	Vn max	Suitable for
(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	(l/min)	(m³/h)	
110	76	25	144	146	44	416.60	25	SDR 9-11
110	76	25	144	146	44	1666.60	100	SDR 9-11
115	76	32	162	198	61	416.60	25	SDR 9-17.6
115	76	32	162	198	61	1666.60	100	SDR 9-17.6
115	76	32	162	208	71	416.60	25	SDR 9-17.6
125	76	32	162	208	71	1666.60	100	SDR 9-17.6
120	76	32	162	216	79	416.60	25	SDR 9-17.6
120	76	32	162	216	79	1666.60	100	SDR 9-17.6
120	76	32	162	233	96	416.60	25	SDR 9-17.6
130	76	32	162	233	96	1666.60	100	SDR 9-17.6

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>