


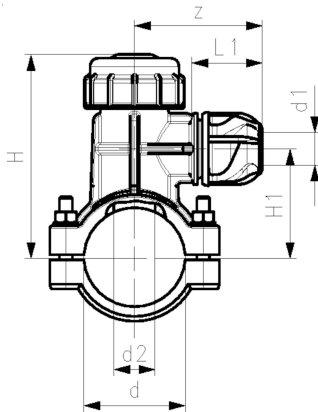

684C - Tapping Saddle for PE and PVC pipes with compression fitting offtake, flat gasket and stainless steel bolts and nuts

- water PN16
- suitable for PE, PEX-a and PVC pipes
- material: PP
- cutter: brass
- offtake gasket: EPDM double lip
- saddle gasket: NBR O-ring with flat lip
- gasket: NBR O-ring sealing cup
- bolts and nuts : stainless steel
- colour: blue-black
- Key kit type (L=little; M=medium; B=big)
- B= N° of bolts
- M= bolt type
- Further offtake sizes obtainable with iJOINT reduction kit

	d (mm)	d1 (mm)	PN (bar)	B	M	Code	SP	GP	Weight (kg)
S	63	32	16	4	M8	158 400 702	1	8	0.536
M	75	40	16	4	M8	158 400 705	1	5	0.795
M	90	40	16	4	M8	158 400 708	1	5	0.853
M	110	25	16	6	M8	158 400 710	1	2	1.110
M	110	32	16	6	M8	158 400 711	1	2	1.132
L	110	63	16	6	M8	158 400 716	1		1.763
L	125	32	16	6	M8	158 400 718	1		1.290
L	160	25	16	6	M10	158 400 719	1		2.290
L	160	32	16	6	M10	158 400 720	1		2.303
L	160	63	16	6	M10	158 400 723	1		2.673

	d (mm)	d1 (mm)	d2 (mm)	H (mm)	H1 (mm)	L (mm)	L1 (mm)	z (mm)
S	63	32	26	125	65	90	63	100
M	75	40	33	142	75	90	74	120
M	90	40	33	152	85	100	74	120
M	110	25	33	190	108	130	60	100
M	110	32	33	190	108	130	77	118
L	110	63	40	205	118	130	125	180
L	125	32	40	210	115	135	77	118
L	160	25	40	235	140	160	60	120
L	160	32	40	235	140	160	76	120
L	160	63	40	250	155	160	128	180

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>