


PVC Elbow SN8 (SDR 34), Single Socket

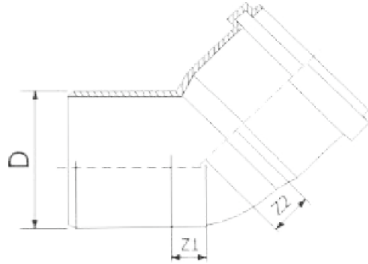

Material	PVC-U
Ring stiffness	SN8 (SDR 34)
Application	Non-pressure underground sewage and rainwater drainage outside buildings
Joining	Socket with EPDM sealing ring

Code	D (mm)	α (°)	Wall thickness	Z1 (mm)	Z2 (mm)
FVE0440	125	15	3.7	8	8
FVE0442	160	15	4.7	7	7
FVE0444	200	15	5.9	15	15
FVE0446	250	15	7.3	35	45
FVE0449	315	15	9.2	95	35
FVE0450	400	15	11.7	160	160
FVE0451	500	15	14.6	200	200
FVE0452	630	15	18.4	280	280
FVE0453	710	15	20.8	220	220
FVE0454	800	15	23.4	220	220
FVE0456	125	30	3.7	17	17
FVE0458	160	30	4.7	20	20
FVE0460	200	30	5.9	37	37
FVE0462	250	30	7.3	55	65
FVE0465	315	30	9.2	120	55
FVE0466	400	30	11.7	225	225
FVE0467	500	30	14.6	285	285
FVE0468	630	30	18.4	375	375
FVE0469	710	30	20.8	330	330
FVE0470	800	30	23.4	330	330
FVE0472	125	45	3.7	26	26
FVE0474	160	45	4.7	32	32
FVE0476	200	45	5.9	48	48
FVE0478	250	45	7.3	75	85
FVE0481	315	45	9.2	140	80
FVE0482	400	45	11.7	255	255
FVE0483	500	45	14.6	325	325
FVE0484	630	45	18.4	460	460
FVE0485	710	45	20.8	410	410
FVE0486	800	45	23.4	420	420
FVE0488	125	87	3.7	59	59
FVE0490	160	87	4.7	59	59
FVE0492	200	87	5.9	99	99
FVE0495	315	87	9.2	440	440
FVE0496	400	87	11.7	495	495
FVE0497	500	87	14.6	575	575
FVE0498	630	87	18.4	770	770
FVE0499	710	87	20.8	745	745
FVE0500	800	87	23.4	780	780

Dimensions as published by the manufacturer; symbols refer to the drawing above.