
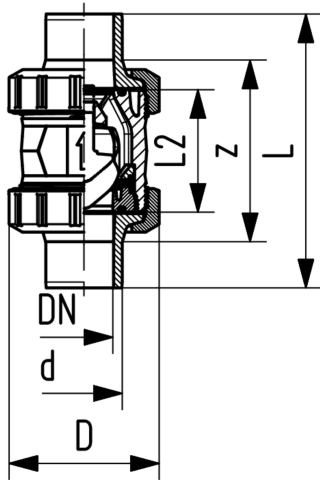


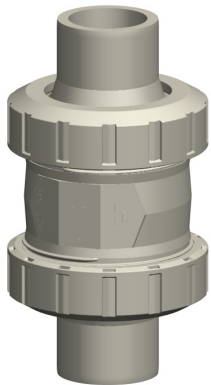

PROGEF Standard Check valve type 562 With socket fusion spigots metric

Model:

- Material: PP-H
- For horizontal or vertical installation
- 100% leak-tight in the closed/idle state, independent of installation orientation and without hydrostatic head
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	EPDM Code	Weight (kg)	FKM Code	Weight (kg)
16	10	10	190	167 562 041	0.080	167 562 051	0.080
20	15	10	180	167 562 042	0.090	167 562 052	0.090
25	20	10	380	167 562 043	0.170	167 562 053	0.190
32	25	10	460	167 562 044	0.200	167 562 054	0.200
40	32	10	850	167 562 045	0.340	167 562 055	0.350
50	40	10	1080	167 562 046	0.510	167 562 056	0.510
63	50	10	1670	167 562 047	0.940	167 562 057	0.950
75	65	10	2950	167 562 048	2.360	167 562 058	2.370
90	80	10	3600	167 562 049	3.730	167 562 059	3.750
110	100	10	4150	167 562 050	5.960	167 562 060	5.980

d (mm)	D (mm)	L (mm)	L2 (mm)	closest inch (inch)
16	50	110	56	$\frac{3}{8}$
20	50	120	56	$\frac{1}{2}$
25	58	139	65	$\frac{3}{4}$
32	68	150	71	1
40	84	170	85	1 $\frac{1}{4}$
50	97	190	89	1 $\frac{1}{2}$
63	124	220	101	2
75	166	280	136	2 $\frac{1}{2}$
90	200	296	141	3
110	238	336	164	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>