
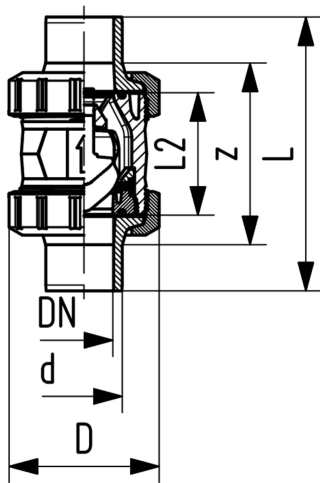


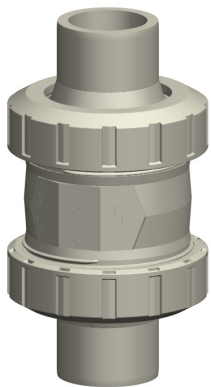

PROGEF Standard Check valve type 562
With butt fusion spigots
SDR17,6 metric

Model:

- Material: PP-H
- For horizontal or vertical installation
- 100% leak-tight in the closed/idle state, independent of installation orientation and without hydrostatic head
- Spring loaded, spring made of stainless steel (1.4310)
- Spring available in other materials, see spare parts
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- Compact installation length, same as ball valve type 546
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

d (mm)	DN (mm)	PN (bar)	kv-value ($\Delta p=1$ bar) (l/min)	SDR	EPDM Code	Weight (kg)	FKM Code	Weight (kg)
50	40	10	1080	17.6	167 562 066	0.510	167 562 076	0.510
63	50	10	1670	17.6	167 562 067	0.940	167 562 077	0.940
75	65	10	2950	17.6	167 562 068	2.340	167 562 078	2.360
90	80	10	3600	17.6	167 562 069	3.650	167 562 079	3.670
110	100	10	4150	17.6	167 562 070	5.790	167 562 080	5.820

d (mm)	D (mm)	L (mm)	L2 (mm)	e (mm)	closest inch (inch)
50	97	191	89	2.9	1 ½
63	124	220	101	3.6	2
75	166	266	136	4.7	2 ½
90	200	264	141	5.5	3
110	238	301	164	6.8	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>