




ABS Check valve type 561
Without spring
With butt fusion spigots long

Model:

- Sealing at a minimum water column of 2 m
- Designed for easy installation and removal
- Vibration free even at high flow velocity
- Flow-optimized return cone, double guided
- For vertical installation
- Z-length, end connectors and union nuts **not** compatible with type 360
- New DN65-DN100

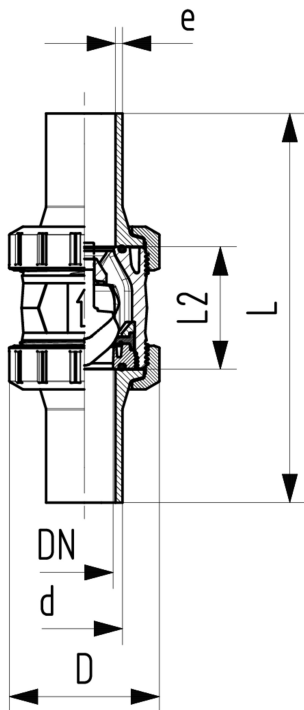

d	DN	Size	PN	kv-value	EPDM	D	L	L2	closest
(mm)	(mm)	(inch)	(bar)	($\Delta p=1$ bar)	Code	(mm)	(mm)	(mm)	inch
				(L/min)					(inch)
20	15	½	10	180	169 561 302	50	215	56	½
25	20	¾	10	380	169 561 303	58	224	65	¾
32	25	1	10	460	169 561 304	68	243	71	1
40	32	1 ¼	10	850	169 561 305	84	276	85	1 ¼
50	40	1 ½	10	1080	169 561 306	97	315	89	1 ½
63	50	2	10	1670	169 561 307	124	357	101	2
75	65	2 ½	10	2950	169 561 308	166	394	136	2 ½
90	80	3	10	3600	169 561 309	200	431	141	3
110	100	4	10	4150	169 561 310	238	494	164	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland

Phone +41 -(0)52-631 1111

e-mail: info.ps@georgfischer.com

Internet: <http://www.gfps.com>