


## TP Backing flange PVC-U metric



- (\*\*) Special flange with bolt holes for DN 140
- **DN** indicates the nominal diameter of the PVC pipe  
Bolt holes PN10
- Maximum medium- or ambient temperature 45°

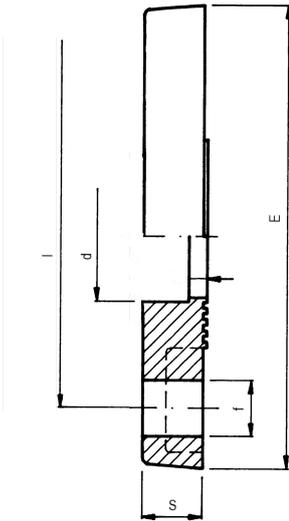

d (mm)	DN (mm)	PN (bar)	Code	SP	GP	Weight (kg)	E (mm)	I (mm)	S (mm)	f (mm)
20	15	10	<b>RV0FLI200</b>	1	120	0.070	95	65	11	14
25	20	10	<b>RV0FLI250</b>	1	100	0.090	105	75	12	14
32	25	10	<b>RV0FLI320</b>	1	50	0.120	115	85	14	14
40	32	10	<b>RV0FLI400</b>	1	50	0.180	140	100	15	18
50	40	10	<b>RV0FLI500</b>	1	70	0.210	150	110	16	18
63	50	10	<b>RV0FLI630</b>	1	45	0.270	165	125	18	18
75	65	10	<b>RV0FLI750</b>	1	50	0.350	185	145	19	18
90	80	10	<b>RV0FLI900</b>	1	38	0.430	200	160	20	18
110	100	10	<b>RV0FLI910</b>	1	24	0.512	220	180	22	18
125	110	10	<b>RV0FLI920</b>	1	25	0.570	230	190	24	18
**	125	125	<b>RV0FAI920</b>	1	20	0.819	250	210	26	18
140	125	10	<b>RV0FLI930</b>	1	20	0.676	250	210	26	18
160	150	10	<b>RV0FLI940</b>	1	15	0.950	285	240	28	22
200	200	10	<b>RV0FLI960</b>	1	8	1.400	340	295	30	22
225	200	10	<b>RV0FLI970</b>	1	6	1.280	340	295	30	22
250	250	6	<b>RV0FLI980</b>	1	8	1.800	395	350	34	22
315	300	6	<b>RV0FLI991</b>	1	4	3.180	445	400	31	22

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>