




TP Blind flange PVC-U metric

Bolt holes PN10

- **DN** indicates the nominal diameter of the PVC pipe
- Maximum medium- or ambient temperature 45°

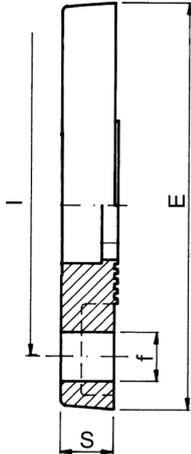

| d (mm) | DN (mm) | PN (bar) | Code | SP | GP | Weight (kg) | f (mm) | S (mm) | I (mm) | E (mm) |
|-----------|------------|-------------|------------------|-----|-----|----------------|-----------|-----------|-----------|-----------|
| 20 | 15 | 10 | RV0FCI200 | 120 | 120 | 0.076 | 14 | 11 | 65 | 95 |
| 25 | 20 | 10 | RV0FCI250 | 100 | 100 | 0.100 | 14 | 12 | 75 | 105 |
| 32 | 25 | 10 | RV0FCI320 | 140 | 140 | 0.139 | 14 | 14 | 85 | 115 |
| 40 | 32 | 10 | RV0FCI400 | 100 | 100 | 0.212 | 18 | 15 | 100 | 140 |
| 50 | 40 | 10 | RV0FCI500 | 70 | 70 | 0.257 | 18 | 16 | 110 | 150 |
| 63 | 50 | 10 | RV0FCI630 | 50 | 50 | 0.348 | 18 | 18 | 125 | 165 |
| 75 | 65 | 10 | RV0FCI750 | 25 | 25 | 0.503 | 18 | 19 | 145 | 185 |
| 90 | 80 | 10 | RV0FCI900 | 20 | 20 | 0.625 | 18 | 20 | 160 | 200 |
| 110 | 100 | 10 | RV0FCI910 | 25 | 25 | 0.828 | 18 | 22 | 180 | 220 |
| 125 | 110 | 10 | RV0FCI920 | 20 | 20 | 0.940 | 18 | 24 | 190 | 230 |
| 140 | 125 | 10 | RV0FCI930 | 18 | 18 | 1.173 | 18 | 26 | 210 | 250 |
| 160 | 150 | 10 | RV0FCI940 | 14 | 14 | 1.609 | 22 | 28 | 240 | 285 |
| 200 | 200 | 10 | RV0FCI960 | 8 | 8 | 2.480 | 22 | 30 | 295 | 340 |
| 225 | 200 | 10 | RV0FCI970 | 8 | 8 | 2.430 | 22 | 30 | 295 | 340 |

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>