


ELGEF Plus Electrofusion coupler PE100
d160-315mm / SDR17

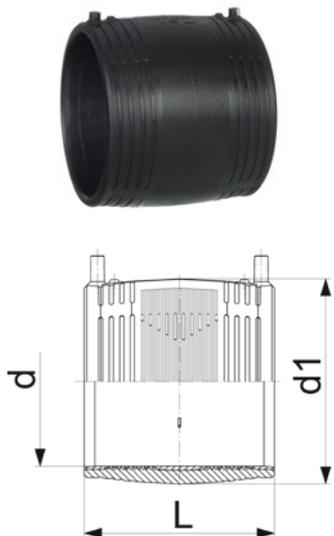

- 5 bar Gas / 10 bar Water
- 4 mm pin connectors
- Limited path fusion indicators
- d160 with removable centre stop

d (mm)	SDR	PN (bar)	DN (mm)	Code	Weight (kg)	d1 (mm)	L (mm)	SDR pipe
160	17	10	150	753 911 817	1.017	186	180	9-26
180	17	10	150	753 911 818	1.434	213	192	9-26
200	17	10	200	753 911 819	1.726	233	206	9-26
225	17	10	200	753 911 820	2.545	261	225	9-26
250	17	10	250	753 911 821	4.616	304	248	9-26
280	17	10	250	753 911 822	5.606	340	252	9-26
315	17	10	300	753 911 823	6.100	382	267	9-26

ELGEF Plus Electrofusion coupler PE100
d355-800mm / SDR17



- 5 bar Gas / 10 bar Water
- 4 mm pin connectors
- Limited path fusion indicators
- With active reinforcement
- Ø355 – 500 have two connected (monofilar) welding zones (Both pipe ends can be welded simultaneously)
- Ø560 – 800 have two separate (bifilar) welding zones (Both pipe ends welded separately)

d (mm)	SDR	PN (bar)	DN (mm)	Code	Weight (kg)	d1 (mm)	L (mm)	SDR pipe
355	17	10	350	753 911 804	9.522	416	291	17-33
400	17	10	400	753 911 805	13.000	467	295	17-33
450	17	10	450	753 911 806	18.000	526	327	17-33
500	17	10	500	753 911 807	22.000	584	358	17-33
560	17	10	600	753 911 808	34.000	647	396	17-33
630	17	10	600	753 911 809	46.000	727	440	17-33
710	17	10	700	753 911 810	55.600	820	463	17-33
800	17	10	800	753 911 811	73.000	922	484	17-33

ELGEF Plus Electrofusion coupler PE100
d900-1200mm / SDR17



- 10 bar water
- Only for water applications
- 4 mm pin connectors

d (mm)	SDR	PN (bar)	DN (mm)	Code	Weight (kg)	d1 (mm)	L (mm)	SDR pipe
900	17	10	900	753 911 852	93.150	1030	550	9-26
1000	17	10	1000	753 911 853	125.650	1143	600	9-26
1200	17	10	1200	753 911 854	196.450	1370	650	9-26

