

# ALL FLANGED CROSS series TT




DUCTILE IRON FITTINGS



## TECHNICAL CHARACTERISTICS

Flange end connections according to EN1092-2  
 Drilling of flanges: PN10/16, starting from DN200 - PN10  
 Designed according to EN545  
 Maximum working pressure: PN16 / 16 bar  
 Working temperature: 0°C - +80°C  
 Color RAL5015  
 Powder epoxy coating 250 µm thickness  
 Body from ductile iron EN-GJS-500-7  
 WRAS approved epoxy coating,  
 ACS approved epoxy coating under request

DN1	DN2	L	H1	H2	Weight	BLUCAST ref. no.
50	50	300	150	150	13	TT050
65	65	330	165	165	19.5	TT065
80	80	330	165	165	17	TT080
100	50	330	165	165	24	TT100050
100	80	330	170	170	24	TT100080
100	100	360	180	180	25	TT100100
150	80	360	200	200	27	TT150080
150	100	380	205	205	30	TT150100
150	150	440	220	220	36.6	TT150
200	100	400	230	230	36.5	TT200100
200	150	460	245	245	43	TT200150
200	200	520	260	260	53.5	TT200
200	200	520	260	260	60.9	TTP200
250	100	420	270	270	51.6	TT250100
250	250	600	300	300	74.8	TT250
300	100	450	300	300	58.6	TT300100
300	150	500	310	310	70	TT300150
300	200	560	320	320	116	TT300200
300	300	680	340	340	102h	TT300
350	350	760	380	380	174	TT350
400	100	490	360	360	149	TT400100
400	150	550	370	370	151	TT400150
400	400	840	420	420	186	TT400
500	500	1000	500	500	231.5	TT500
600	600	1100	550	550	416	TT600

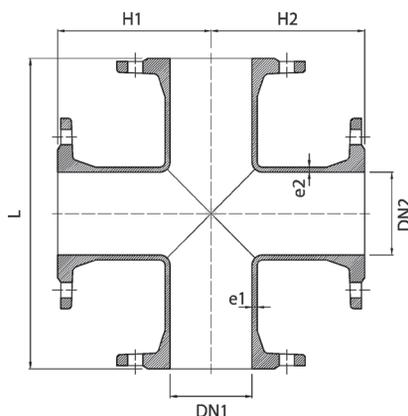

All illustrations, technical data, dimensions (in mm) and weights (all weights specified in kg) are non-binding and are subject to change

