




ELGEF Plus Tapping saddle PE100 d63-400mm/ SDR11 / With 360° rotatable outlet

- 10 bar Gas / 16 bar Water
- With integrated cutter to tap live mains under pressure
- Complete with lower part
- 4 mm pin connectors
- Limited path fusion indicators
- Long fusion outlet
- O-ring-sealed screw cap
- d355-400mm. Not suitable for pipes if wall thickness is larger than SDR17 pipes.

Note:


*d355 and d400 are newly delivered with underpart

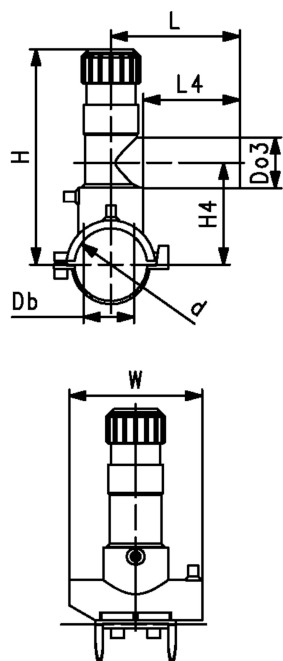

d	Do3	DN	PN	Code	Weight	L	L4	Db	W	H	H4	Suitable for
(mm)	(mm)	(mm)	(bar)		(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
63	20	50	16	193 131 402	0.697	130	71	32	164	186	108	SDR Pipe 9-11
63	25	50	16	193 131 403	0.637	130	71	32	164	186	108	SDR Pipe 9-11
63	32	50	16	193 131 404	0.701	130	76	32	164	186	108	SDR Pipe 9-11
63	40	50	16	193 131 405	0.718	137	81	32	164	186	108	SDR Pipe 9-11
63	63	50	16	193 131 437	1.426	160	100	32	164	134	112	SDR Pipe 9-11
75	20	65	16	193 131 442	0.831	130	71	32	164	191	113	SDR Pipe 9-11
75	25	65	16	193 131 443	0.830	130	71	32	164	191	113	SDR Pipe 9-11
75	32	65	16	193 131 444	0.812	130	76	32	164	191	113	SDR Pipe 9-11
75	40	65	16	193 131 445	0.849	137	81	32	164	191	113	SDR Pipe 9-11
75	63	65	16	193 131 447	1.549	160	100	32	164	240	118	SDR Pipe 9-11
90	20	80	16	193 131 452	0.794	130	71	32	164	199	121	SDR Pipe 9-11
90	25	80	16	193 131 453	0.790	130	71	32	164	199	121	SDR Pipe 9-11
90	32	80	16	193 131 454	0.770	130	76	32	164	199	121	SDR Pipe 9-11
90	40	80	16	193 131 455	0.811	137	81	32	164	199	121	SDR Pipe 9-11
90	63	80	16	193 131 457	1.494	160	100	35	164	248	126	SDR Pipe 9-11
110	20	100	16	193 131 462	0.826	130	71	32	164	209	131	SDR Pipe 9-17.6
110	25	100	16	193 131 463	0.808	130	71	32	164	209	131	SDR Pipe 9-17.6
110	32	100	16	193 131 464	0.831	130	76	32	164	209	131	SDR Pipe 9-17.6
110	40	100	16	193 131 465	0.805	137	81	32	164	209	131	SDR Pipe 9-17.6
110	63	100	16	193 131 467	1.097	160	100	35	164	258	136	SDR Pipe 9-17.6
125	20	100	16	193 131 472	0.880	130	71	32	164	216	138	SDR Pipe 9-17.6
125	25	100	16	193 131 473	0.878	130	71	32	164	216	138	SDR Pipe 9-17.6
125	32	100	16	193 131 474	0.878	130	76	32	164	216	138	SDR Pipe 9-17.6
125	40	100	16	193 131 475	0.874	137	81	32	164	216	138	SDR Pipe 9-17.6
125	63	100	16	193 131 477	1.184	160	100	35	164	265	143	SDR Pipe 9-17.6
140	20	125	16	193 131 482	0.887	130	71	32	164	233	146	SDR Pipe 9-17.6
140	25	125	16	193 131 483	0.874	130	71	32	164	233	146	SDR Pipe 9-17.6
140	32	125	16	193 131 484	0.894	130	76	32	164	233	146	SDR Pipe 9-17.6
140	40	125	16	193 131 485	0.920	137	81	32	164	233	146	SDR Pipe 9-17.6
140	63	125	16	193 131 487	1.180	160	100	35	164	273	151	SDR Pipe 9-17.6
160	20	150	16	193 131 492	0.916	130	71	32	164	243	156	SDR Pipe 9-17.6
160	25	150	16	193 131 493	0.912	130	71	32	164	243	156	SDR Pipe 9-17.6
160	32	150	16	193 131 494	0.915	130	76	32	164	243	156	SDR Pipe 9-17.6
160	40	150	16	193 131 495	0.936	137	81	32	164	243	156	SDR Pipe 9-17.6
160	63	150	16	193 131 497	1.221	160	100	35	164	283	161	SDR Pipe 9-17.6
180	20	150	16	193 131 502	0.994	130	71	32	164	244	166	SDR Pipe 9-26
180	25	150	16	193 131 503	1.001	130	71	32	164	244	166	SDR Pipe 9-26
180	32	150	16	193 131 504	0.957	130	76	32	164	244	166	SDR Pipe 9-26
180	40	150	16	193 131 505	1.007	137	81	32	164	244	166	SDR Pipe 9-26
180	63	150	16	193 131 507	1.587	160	100	35	164	293	171	SDR Pipe 9-26
200	20	200	16	193 131 512	1.015	130	71	32	164	254	176	SDR Pipe 9-26
200	25	200	16	193 131 513	1.015	130	71	32	164	254	176	SDR Pipe 9-26
200	32	200	16	193 131 514	0.985	130	76	32	164	254	176	SDR Pipe 9-26
200	40	200	16	193 131 515	1.024	137	81	32	164	254	176	SDR Pipe 9-26
200	63	200	16	193 131 517	1.290	160	100	35	164	303	181	SDR Pipe 9-26
225	20	200	16	193 131 522	1.016	130	71	32	164	266	188	SDR Pipe 11-26

Data sheet

valid from: 3/28/26

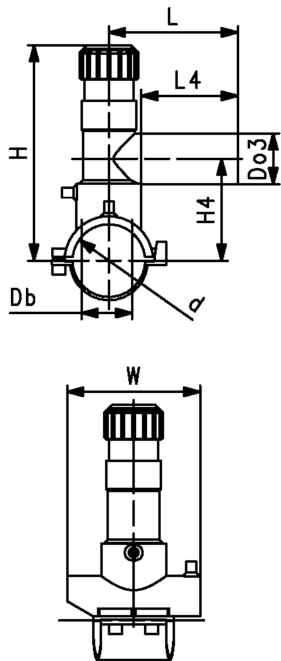

d	Do3	DN	PN	Code	Weight	L	L4	Db	W	H	H4	Suitable for
(mm)	(mm)	(mm)	(bar)		(kg)	(mm)	(mm)	(mm)	(mm)	(mm)	(mm)	
225	25	200	16	193 131 523	1.025	130	71	32	164	266	188	SDR Pipe 11-26
225	32	200	16	193 131 524	1.019	130	76	32	164	266	188	SDR Pipe 11-26
225	40	200	16	193 131 525	1.029	137	81	32	164	266	188	SDR Pipe 11-26
225	63	200	16	193 131 527	1.738	160	100	35	164	315	193	SDR Pipe 11-26
250	25	250	16	193 131 533	1.026	130	76	32	164	279	201	SDR Pipe 11-26
250	20	250	16	193 131 532	1.025	130	76	32	164	279	201	SDR Pipe 11-26
250	32	250	16	193 131 534	0.996	130	76	32	164	279	201	SDR Pipe 11-26
250	63	250	16	193 131 537	1.733	160	100	35	164	328	206	SDR Pipe 11-26
250	40	250	16	193 131 535	1.008	137	81	32	164	279	201	SDR Pipe 11-26
280	63	250	16	193 131 548	1.478	160	100	35	164	343	206	SDR Pipe 11-26
315	63	300	16	193 131 558	1.481	160	100	35	164	381	206	SDR Pipe 11-33
355	63	350	16	193 131 567	1.481	160	100	35	165	381	206	SDR Pipe 17-33
400	63	400	16	193 131 578	1.473	160	100	35	165	403	206	SDR Pipe 17-33

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail: info.ps@georgfischer.com Internet: <http://www.gfps.com>