




ABS Ventilating and bleed valve Type 591
With butt fusion spigots long
PE100 SDR11 metric

Model:

- Material: ABS/PE
- With protection cap up to DN50 made of PP-GF, DN65-100 made of POM
- Floater made of PP-H
- Designed for easy installation and removal
- Compact installation length

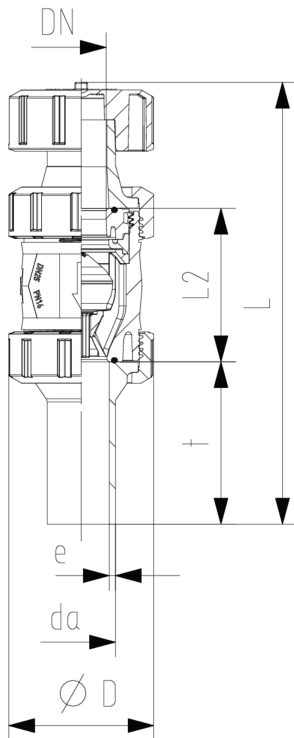

d	DN	PN	EPDM	D	L	L2	t	e	closest inch
(mm)	(mm)	(bar)	Code	(mm)	(mm)	(mm)	(mm)	(mm)	(inch)
20	15	16	800 059 985	50	175	56	69	2.25	½
25	20	16	800 063 804	58	195	65	76	2.30	¾
32	25	16	800 063 805	68	207	71	76	2.90	1
40	32	16	800 063 441	84	230	85	82	3.70	1 ¼
50	40	16	800 063 442	97	254	89	91	4.60	1 ½
63	50	16	800 063 443	124	298	101	110	5.80	2
75	65	16	800 063 444	166	334	136	125	6.80	2 ½
90	80	16	800 063 445	200	360	141	140	8.20	3
110	100	16	800 063 446	238	411	164	160	10.00	4

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
 info.ps@georgfischer.com Internet: <http://www.gfps.com>