


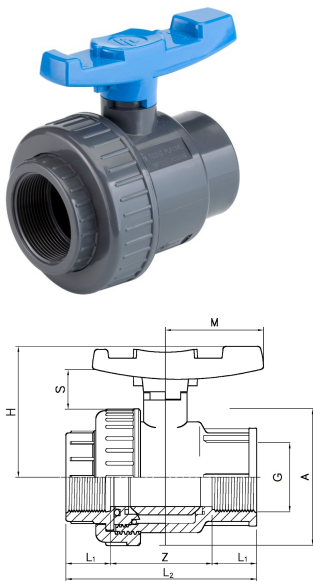

Single union safeblock B.S.P. PVC-U
Ball valve with threaded sockets G

d1 (inch)	DN (mm)	PN (bar)	EPDM Code	SP	Weight (kg)	H (mm)	L2 (mm)	L1 (mm)	A (mm)	S (mm)	M (mm)	Z (mm)
3/8	10	16	VSA18F160	180	0.100	53	76	14	50	19	40	48
1/2	15	16	VSA18F200	180	0.100	53	80	16	50	19	40	48
3/4	20	16	VSA18F250	120	0.160	60	91	19	59	19	45	53
1	25	16	VSA18F320	75	0.230	67	102	22	68	21	51	58
1 1/4	32	16	VSA18F400	45	0.335	79	120	26	80	25	59	68
1 1/2	40	16	VSA18F500	80	0.515	90	140	31	94	27	70	78
2	50	16	VSA18F630	18	0.890	107	169	38	115	29	84	93
2 1/2	65	10	VSA18F750	8	1.620	129	206	44	145	32	103	118
3	80	10	VSA18F900	5	2.420	143	242	51	168	36	120	140
4	100	10	VSA18F910	2	4.559	169	282	61	210	43	141	160

The technical data are not binding. They neither constitute expressly warranted characteristics nor guaranteed properties nor a guaranteed durability. They are subject to modification. Our General Terms of Sale apply.

Georg Fischer Piping Systems Ltd, Postfach, CH-8201 Schaffhausen/Switzerland Phone +41 -(0)52-631 1111 e-mail:
info.ps@georgfischer.com Internet: <http://www.gfps.com>