



Elbows



ELGEF Plus Elbow 90° PE100 d20-63mm / SDR11 / with integral pipe fixation

- 10 bar Gas / 16 bar Water
- 4 mm pin connectors
- Limited path fusion indicators

d	DN	PN	SDR	Code	Weight	d1	L	L1	z	SDR pipe
(mm)	(mm)	(bar)			(kg)	(mm)	(mm)	(mm)	(mm)	
20	15	16	11	753 101 606	0.080	35	54	34	20	9-11
25	20	16	11	753 101 607	0.074	35	54	34	20	9-11
32	25	16	11	753 101 608	0.094	44	53	36	17	9-11
40	32	16	11	753 101 609	0.128	54	62	39	23	9-11
50	40	16	11	753 101 610	0.196	66	71	43	28	9-11
63	50	16	11	753 101 611	0.312	81	81	48	32	9-17.6



ELGEF Plus Elbow 90° PE100 d75-180mm / SDR11

- 10 bar Gas / 16 bar Water
- 4 mm pin connectors
- Limited path fusion indicators




d	DN	PN	SDR	Code	Weight	d1	L	L1	z	SDR pipe
(mm)	(mm)	(bar)			(kg)	(mm)	(mm)	(mm)	(mm)	
75	65	16	11	753 101 612	0.415	97	94	54	40	9-11
90	80	16	11	753 101 813	0.828	115	122	62	60	9-17.6
110	100	16	11	753 101 814	1.224	140	147	72	76	9-17.6
125	100	16	11	753 101 815	1.742	160	155	77	68	9-17.6
140	125	16	11	753 101 816	2.762	185	170	83	87	9-17.6
160	150	16	11	753 101 817	3.830	196	191	92	103	11-17.6
180	150	16	11	753 101 818	5.410	219	210	96	114	11-17.6



ELGEF Plus Elbow 90° PE100 d200-250mm / SDR11

- 10 bar Gas / 16 bar Water
- 4 mm pin connectors
- Limited path fusion indicators
- Two separate fusion zones

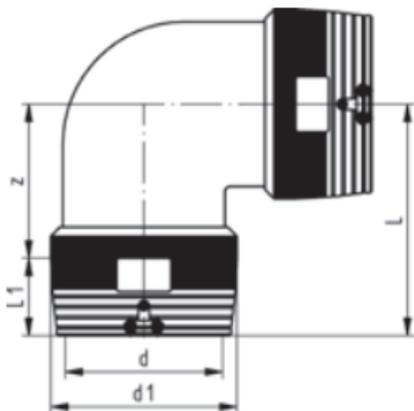

d (mm)	DN (mm)	PN (bar)	SDR	Code	Weight (kg)	d1 (mm)	L (mm)	L1 (mm)	z (mm)	SDR pipe
200	200	16	11	753 101 819	9.320	250	298	104	194	11-26
225	200	16	11	753 101 820	13.220	280	318	112	206	11-26
250	250	16	11	753 101 821	16.600	310	347	123	224	11-26