

SADDLE FOR PE/PVC PIPES series BPE



APPLICATION

BLUCAST saddles for PE/PVC are easy to mount, maintenance free and designed for long life.

TECHNICAL CHARACTERISTICS


Maximum working pressure: PN16 / 16 bar
 Working temperature: 0°C - +80°C
 Color RAL5015
 Powder epoxy coating 250 µm thickness



TAPPING SADDLES

DN	DE	G	Length	H	Weight	BLUCAST ref. no.
DN50	50	1"	100	84	1.5	BPE0501
DN50	50	1 1/4"	100	84	1.5	BPE050114
DN50	50	1 1/2"	100	84	2	BPE050112
DN63	63	1"	100	97	1.7	BPE0631
DN63	63	1 1/4"	100	97	1.7	BPE063114
DN63	63	1 1/2"	100	97	1.7	BPE063112
DN63	63	2"	100	97	1.8	BPE0632
DN75	75	1"	100	111	2.1	BPE0751
DN75	75	1 1/4"	100	111	2.1	BPE075114
DN75	75	1 1/2"	100	111	3.3	BPE075112
DN75	75	2"	100	111	2.1	BPE0752
DN90	90	1"	100	124	2.5	BPE0901
DN90	90	1 1/4"	100	124	2.5	BPE090114
DN90	90	1 1/2"	100	124	1.5	BPE090112
DN90	90	2"	100	124	2.5	BPE0902
DN110	110	1"	110	148	3.2	BPE1101
DN110	110	1 1/4"	110	148	3.2	BPE110114
DN110	110	1 1/2"	110	148	2	BPE110112
DN110	110	2"	110	148	3.2	BPE1102
DN125	125	1"	110	158	2.5	BPE1251
DN125	125	1 1/2"	110	158	2.5	BPE125112
DN125	125	2"	110	158	2.2	BPE1252
DN160	160	1"	125	209	4.9	BPE1601
DN160	160	1 1/4"	125	209	4.9	BPE160114
DN160	160	1 1/2"	125	209	4.9	BPE160112
DN160	160	2"	125	209	4.9	BPE1602
DN200	200	1"	125	251	6.4	BPE2001
DN200	200	1 1/4"	125	251	6.4	BPE200114
DN200	200	1 1/2"	125	251	5.3	BPE200112
DN200	200	2"	125	251	6.4	BPE2002
DN250	250	2"	168	351	11	BPE2502
DN315	315	2"	195	385	15.5	BPE3152

No.	Item	Material
1	Body	Ductile iron EN-GJS-500-7
2	Gasket	EPDM
3	Bolts	AISI304 stainless steel

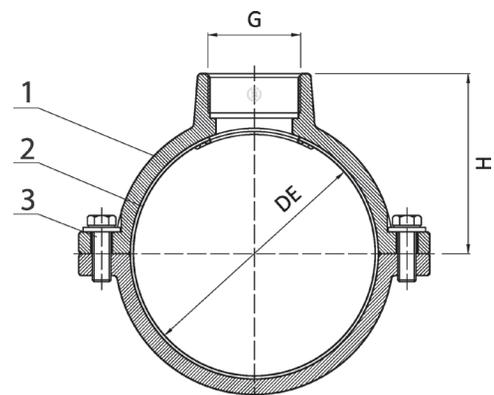

All illustrations, technical data, dimensions (in mm) and weights (all weights specified in kg) are non-binding and are subject to change

